
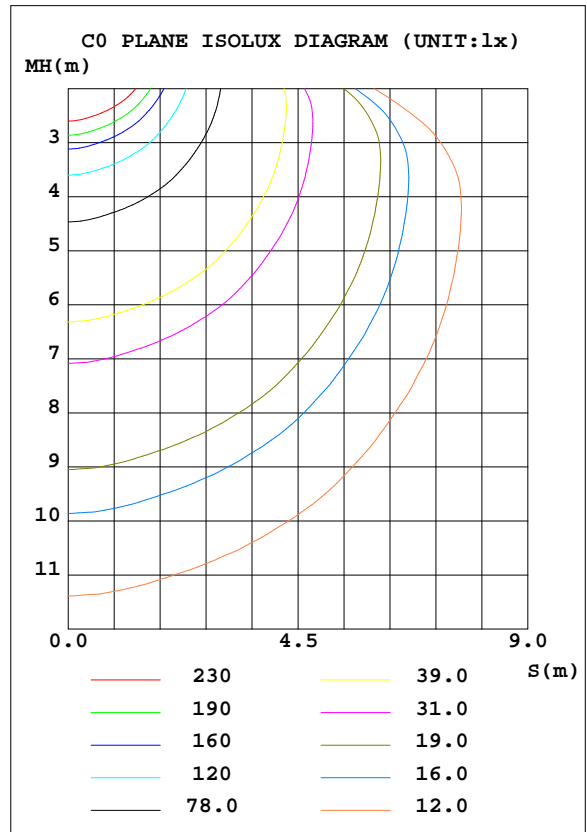


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.56 lm/W			
MODEL	ZC-ML01-50W	I _{max} (cd)	2360	S/MH(C0/180)	1.59
NOMINAL POWER(W)	52	LOR(%)	100.0	S/MH(C90/270)	1.81
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	6617.0	η UP, DN(C0-180)	0.7,55.8
NOMINAL FLUX(lm)	6616.97	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.9,42.6
LAMPS INSIDE	1	η up(%)	1.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	232.1	η down(%)	98.4	CIBSE SHR MAX	1.55

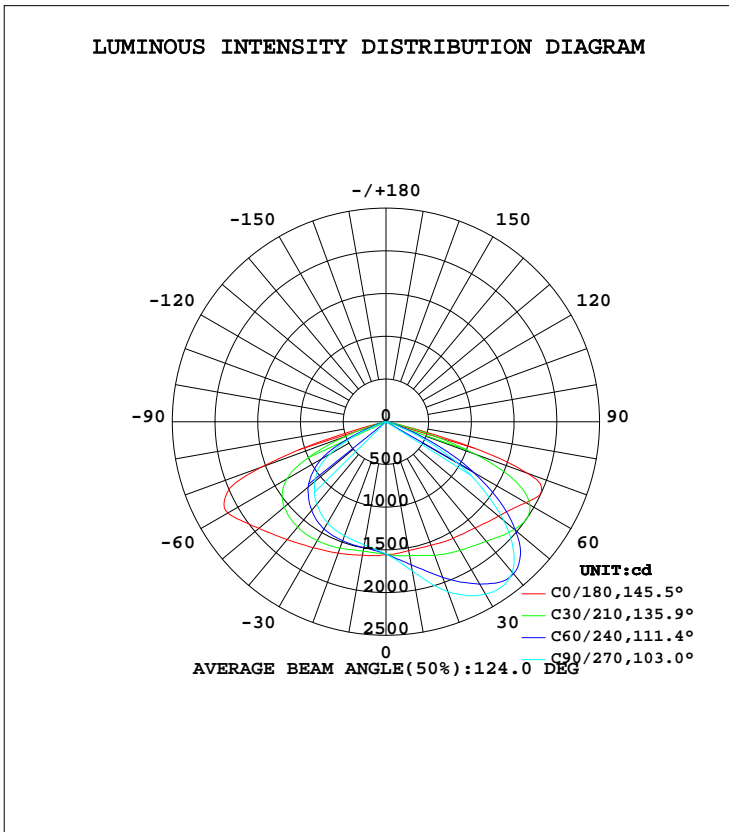

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	1532	1646	1771	1684	1585	1516	1464	1469	0- 10	149.6	149.6	2.26,2.26
20	1540	1801	2116	1868	1637	1527	1420	1448	10- 20	461.0	610.6	9.23,9.23
30	1575	1966	2328	2043	1702	1530	1366	1440	20- 30	791.4	1402	21.2,21.2
40	1622	2074	2296	2147	1800	1481	1258	1382	30- 40	1107	2509	37.9,37.9
50	1719	1970	1798	2012	1943	1372	1089	1277	40- 50	1331	3839	58,58
60	1892	1562	967.6	1501	2138	1106	755.4	1083	50- 60	1363	5203	78.6,78.6
70	1760	690.2	157.4	522.0	1551	365.8	114.9	426.4	60- 70	1026	6229	94.1,94.1
80	56.24	55.97	38.70	47.70	52.78	34.91	23.00	38.82	70- 80	258.3	6487	98,98
90	11.94	10.51	10.03	10.40	12.34	12.32	11.10	11.59	80- 90	23.21	6511	98.4,98.4
100	14.16	11.78	10.75	11.43	14.40	14.21	13.42	13.85	90-100	13.15	6524	98.6,98.6
110	16.02	13.49	12.14	12.58	16.76	16.58	16.08	16.50	100-110	14.73	6538	98.8,98.8
120	17.46	15.36	14.04	14.23	18.05	18.25	18.42	18.46	110-120	15.74	6554	99.1,99.1
130	18.60	16.97	15.50	15.49	19.26	19.44	19.85	19.80	120-130	15.58	6570	99.3,99.3
140	20.77	18.72	17.07	17.43	21.43	21.05	20.70	20.93	130-140	14.57	6584	99.5,99.5
150	23.20	20.73	19.15	19.66	23.60	23.25	22.14	22.46	140-150	12.96	6597	99.7,99.7
160	24.90	22.85	21.66	21.90	24.88	24.98	24.24	23.94	150-160	10.47	6608	99.9,99.9
170	25.49	24.38	23.88	23.49	25.54	25.63	25.60	24.69	160-170	6.850	6615	100,100
180	25.62	25.31	25.25	24.33	25.78	25.30	25.15	24.32	170-180	2.379	6617	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	1.00	.96	1.02	.98	.95	.97	.94	.91	.93	.91	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.67	.59	.52	.65	.57	.51	.62	.56	.51	.60	.54	.50	.47
5.0	.61	.51	.45	.60	.51	.44	.57	.49	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.54	.45	.38	.53	.44	.38	.51	.43	.37	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.39	.33	.48	.39	.33	.46	.38	.33	.44	.37	.32	.43	.37	.32	.30
8.0	.44	.35	.29	.43	.35	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.26
9.0	.40	.31	.26	.39	.31	.26	.38	.31	.25	.37	.30	.25	.36	.29	.25	.23
10.0	.37	.28	.23	.36	.28	.23	.35	.28	.23	.34	.27	.22	.33	.27	.22	.20

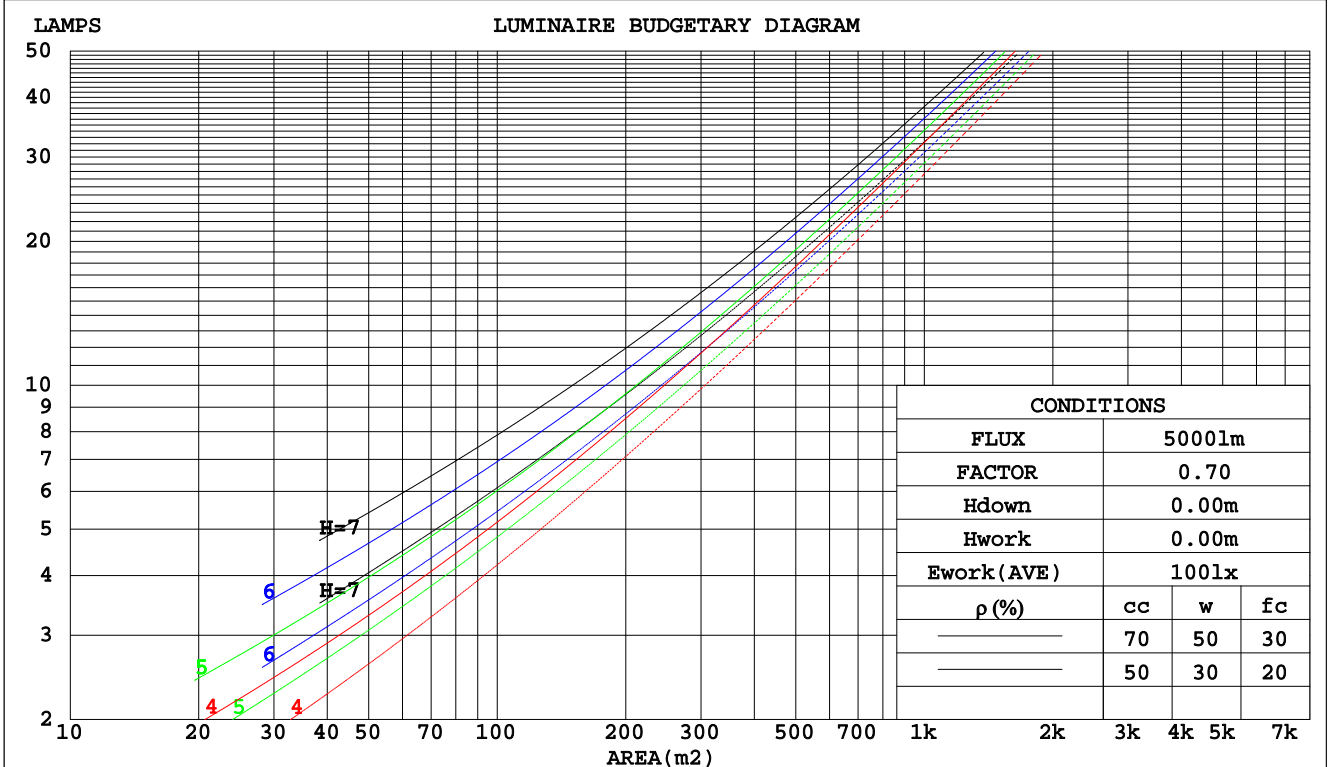

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

WEC AND CCEC

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.296	.168	.053	.288	.164	.052	.274	.157	.050	.261	.151	.048	.249	.145	.047	
2.0	.289	.158	.049	.282	.156	.048	.270	.150	.047	.258	.145	.045	.248	.140	.044	
3.0	.273	.145	.043	.267	.143	.043	.256	.139	.042	.245	.134	.041	.236	.131	.040	
4.0	.254	.132	.039	.249	.130	.039	.239	.127	.038	.230	.123	.037	.221	.120	.037	
5.0	.237	.121	.035	.232	.119	.035	.223	.116	.034	.215	.113	.034	.207	.111	.033	
6.0	.220	.110	.032	.216	.109	.031	.208	.107	.031	.200	.104	.031	.193	.102	.030	
7.0	.205	.101	.029	.201	.100	.029	.194	.098	.028	.187	.096	.028	.181	.094	.028	
8.0	.192	.094	.026	.188	.093	.026	.182	.091	.026	.176	.089	.026	.170	.087	.025	
9.0	.179	.087	.024	.176	.086	.024	.170	.084	.024	.165	.083	.024	.160	.081	.023	
10.0	.169	.081	.022	.166	.080	.022	.160	.079	.022	.155	.077	.022	.151	.076	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.169	.148	.164	.145	.127	.112	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.144	.111	.158	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.178	.127	.086	.152	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.171	.114	.070	.146	.098	.061	.101	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.164	.103	.059	.141	.089	.051	.097	.063	.036	.056	.037	.021	.018	.012	.007	
6.0	.157	.095	.051	.135	.082	.044	.093	.058	.031	.054	.034	.019	.017	.011	.006	
7.0	.150	.088	.045	.129	.077	.039	.089	.054	.028	.052	.032	.017	.017	.010	.005	
8.0	.144	.083	.041	.124	.072	.035	.086	.050	.025	.050	.030	.015	.016	.010	.005	
9.0	.138	.078	.037	.119	.068	.033	.082	.048	.023	.048	.028	.014	.016	.009	.005	
10.0	.132	.074	.035	.114	.064	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

Uncorrected UGR Table

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm										
NAME: ZC-ML01-50W					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:		
MFR.: ZC-ML01-50W					SUR.:0.15*0.15			PROTECTION ANGLE:		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	32.2	33.7	32.5	34.0	34.2	29.9	31.4	30.1	31.6	31.9
3H	34.9	36.3	35.2	36.6	36.8	30.0	31.4	30.3	31.7	31.9
4H	35.3	36.6	35.6	36.9	37.2	29.9	31.2	30.2	31.5	31.8
6H	35.2	36.5	35.5	36.8	37.1	29.8	31.1	30.1	31.4	31.7
8H	35.1	36.4	35.5	36.7	37.0	29.7	31.0	30.1	31.3	31.6
12H	35.1	36.3	35.5	36.6	36.9	29.7	30.9	30.1	31.2	31.5
4H 2H	32.7	34.0	33.0	34.3	34.6	30.8	32.1	31.1	32.4	32.7
3H	35.3	36.5	35.7	36.8	37.2	30.9	32.1	31.3	32.4	32.7
4H	35.7	36.8	36.1	37.1	37.5	30.8	31.9	31.2	32.3	32.6
6H	35.6	36.6	36.1	37.0	37.4	30.8	31.7	31.2	32.1	32.5
8H	35.6	36.5	36.0	36.9	37.3	30.7	31.6	31.2	32.0	32.4
12H	35.6	36.4	36.0	36.8	37.2	30.7	31.5	31.1	31.9	32.3
8H 4H	35.6	36.5	36.1	36.9	37.3	31.0	31.9	31.5	32.3	32.7
6H	35.6	36.3	36.0	36.7	37.2	31.0	31.7	31.5	32.1	32.6
8H	35.5	36.1	36.0	36.6	37.1	31.0	31.6	31.4	32.0	32.5
12H	35.5	36.0	36.0	36.5	37.0	30.9	31.5	31.4	31.9	32.5
12H 4H	35.6	36.4	36.0	36.8	37.2	31.0	31.8	31.5	32.2	32.6
6H	35.5	36.1	36.0	36.6	37.1	31.0	31.6	31.4	32.0	32.5
8H	35.5	36.0	36.0	36.5	37.0	30.9	31.5	31.4	31.9	32.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.4 / - 0.6				
1.5H	+ 0.2 / - 0.4					+ 0.7 / - 1.2				
2.0H	+ 0.6 / - 0.8					+ 0.9 / - 1.6				

CIE Pub.117 Corrected 6617 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	33	52	40	33	51	40	33	26
0.80	64	51	44	63	51	43	61	50	43	36
1.00	73	61	54	72	61	53	69	62	53	45
1.25	81	70	63	79	69	62	76	68	61	53
1.50	86	76	69	85	75	68	81	73	67	59
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	96	104	99	94	99	95	91	82
5.00	109	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

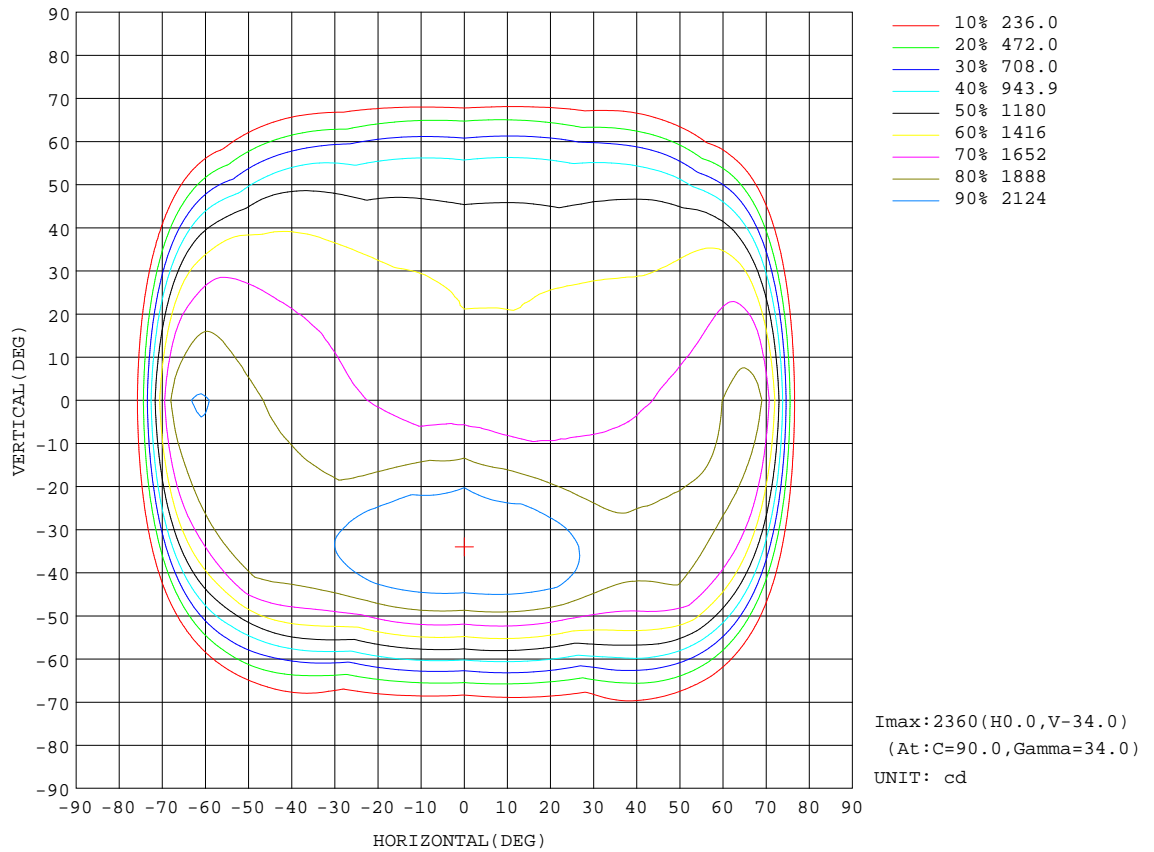


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7312]
 Remarks:

AAI Figure

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

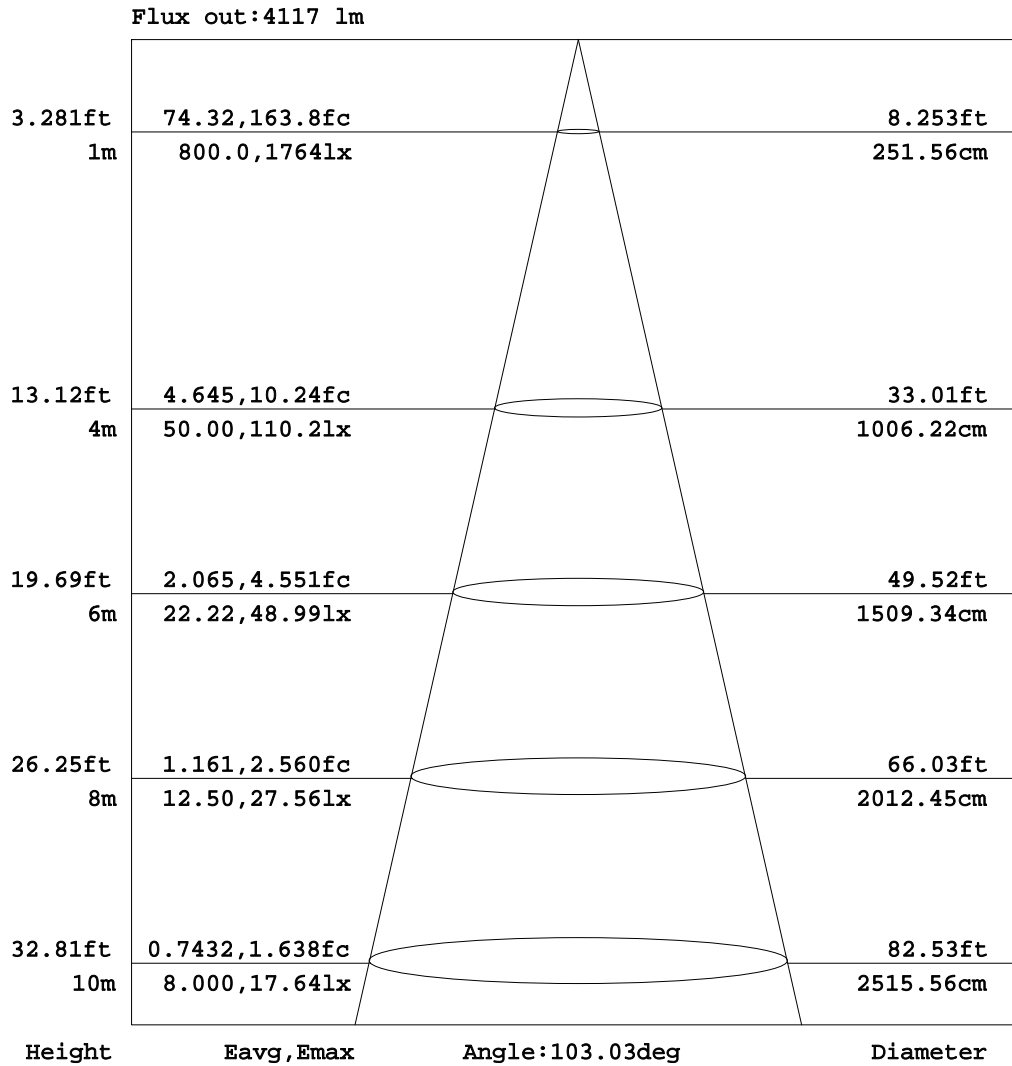


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ISOLUX DIAGRAM


Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

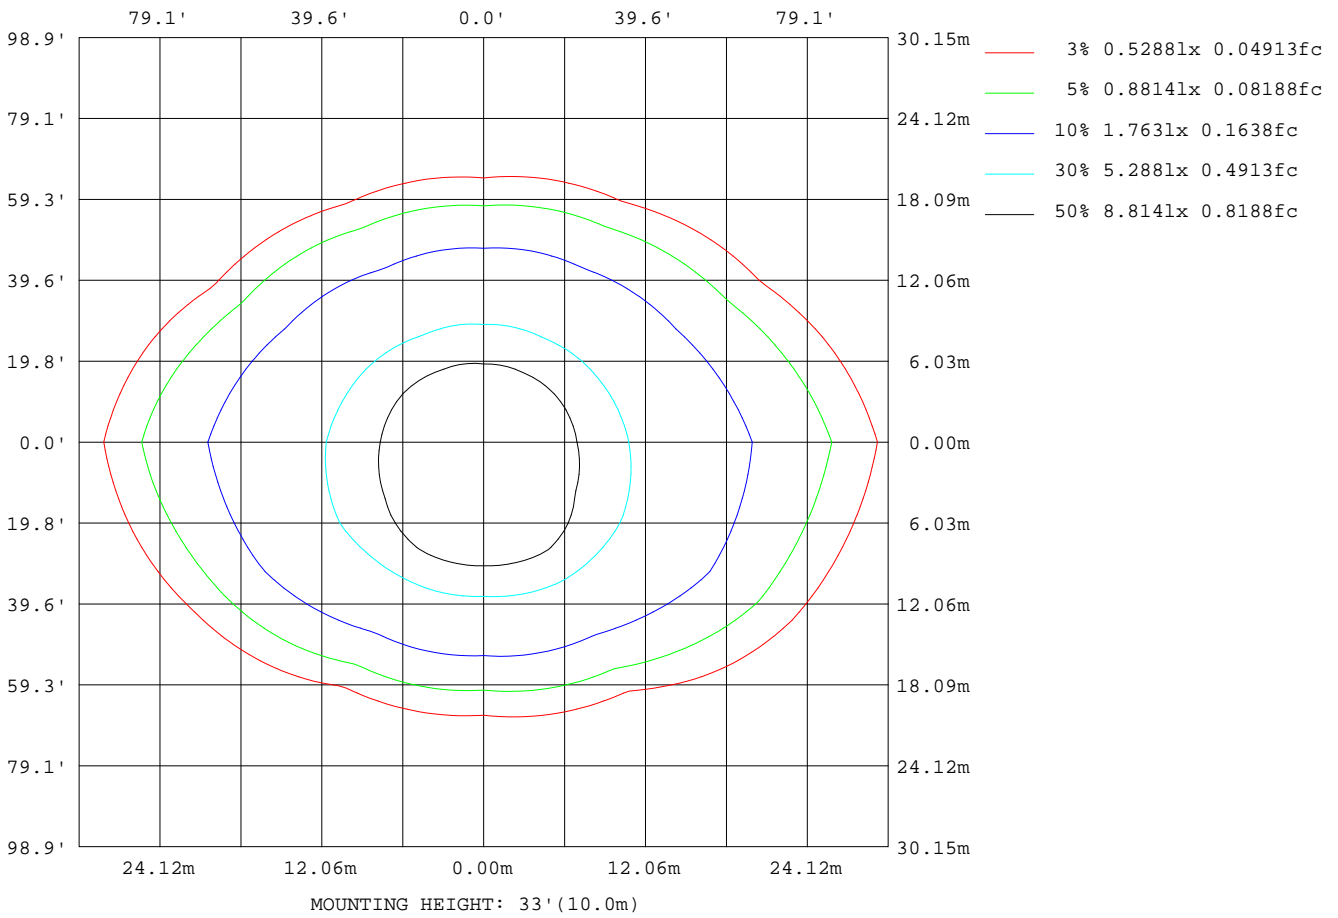

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

Planar Illuminance Curve

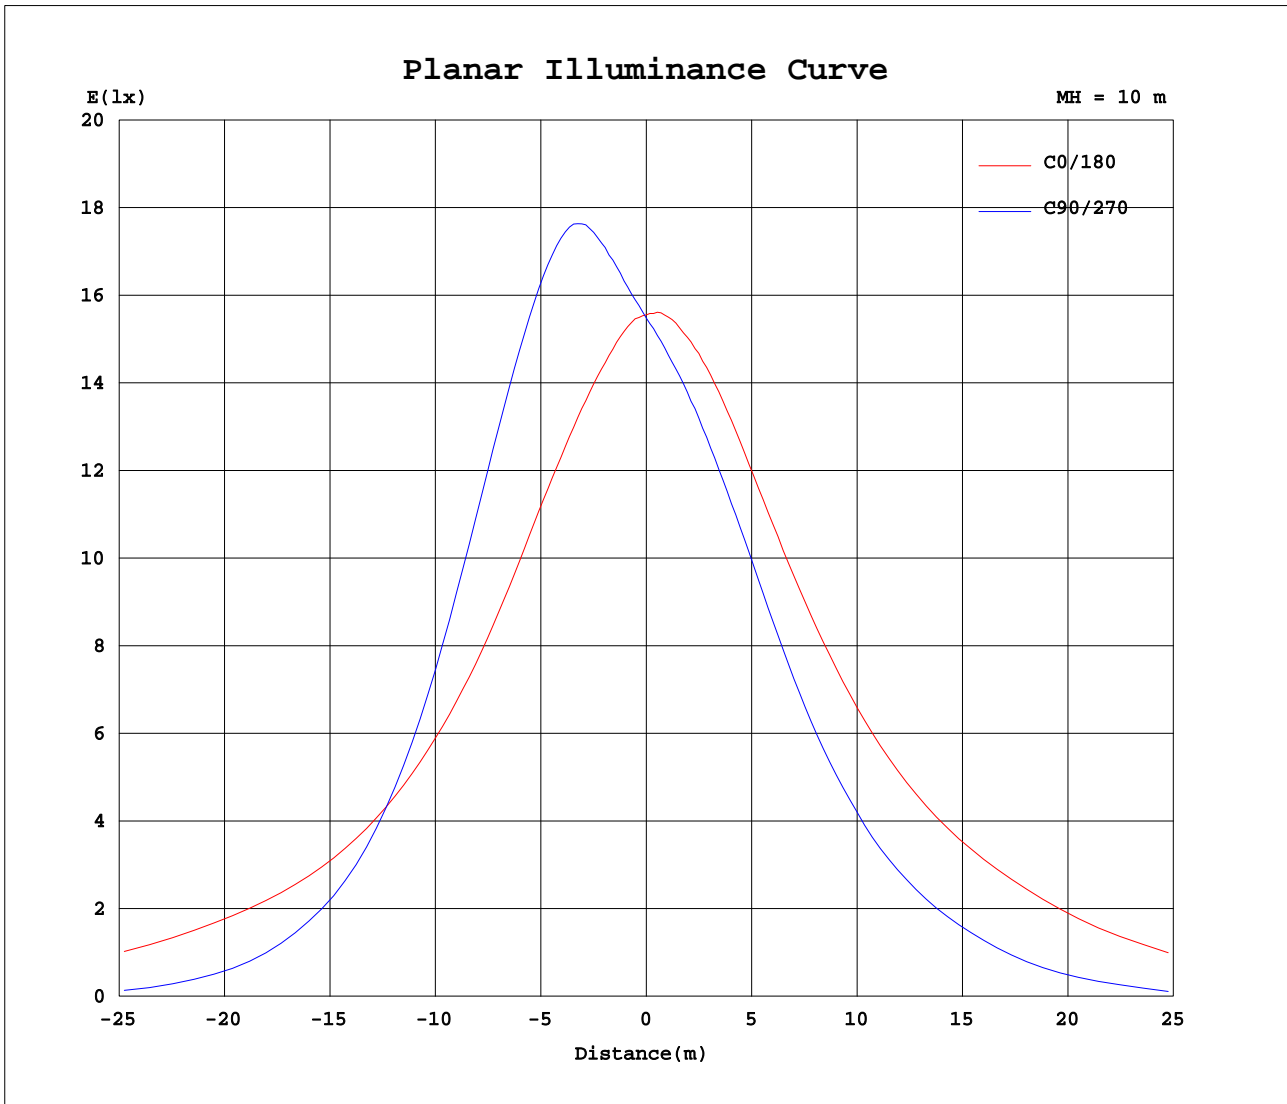

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7312]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:232.2V I:0.2283A P:51.47W PF:0.9443 Lamp Flux:6616.97x1 lm		
NAME: ZC-ML01-50W	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: ZC-ML01-50W	SUR.:0.15*0.15	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1555	1549	1551	1549	1546	1541	1555	1549	1551	1549	1546	1541							
5	1546	1574	1616	1638	1631	1591	1573	1539	1512	1497	1497	1505							
10	1532	1591	1700	1771	1734	1634	1585	1537	1496	1464	1462	1475							
15	1531	1621	1807	1944	1862	1686	1609	1550	1491	1439	1443	1462							
20	1540	1664	1938	2116	1999	1737	1637	1573	1482	1420	1427	1469							
25	1556	1701	2071	2243	2127	1783	1666	1593	1471	1400	1411	1479							
30	1575	1737	2195	2328	2248	1839	1702	1607	1452	1366	1393	1488							
35	1595	1776	2297	2360	2338	1904	1745	1613	1413	1318	1355	1480							
40	1622	1826	2322	2296	2317	1977	1800	1609	1354	1258	1300	1464							
45	1667	1895	2224	2105	2188	2050	1863	1591	1279	1188	1235	1434							
50	1719	1962	1979	1798	1920	2103	1943	1553	1190	1089	1159	1395							
55	1789	2001	1627	1399	1550	2077	2038	1483	1055	965	1056	1350							
60	1892	1943	1181	968	1109	1894	2138	1339	873	755	891	1275							
65	1996	1691	697	515	623	1452	2071	1019	550	454	580	1087							
70	1760	1117	263	157	223	821	1551	518	214	115	229	624							
75	596	381	93.8	75.6	90.4	201	324	116	69.8	52.8	77.1	144							
80	56.2	65.1	46.8	38.7	44.7	50.7	52.8	40.1	29.7	23.0	32.4	45.2							
85	23.6	24.1	18.8	17.0	17.3	19.8	22.9	16.8	13.9	12.0	14.0	18.5							
90	11.9	11.0	10.0	10.0	10.2	10.6	12.3	12.7	11.9	11.1	11.4	11.8							
95	13.1	11.6	10.4	10.3	10.6	11.4	13.3	13.6	12.8	12.2	12.4	12.9							
100	14.2	12.5	11.1	10.7	10.9	11.9	14.4	14.6	13.9	13.4	13.6	14.1							
105	15.2	13.4	11.8	11.3	11.4	12.4	15.7	15.8	15.0	14.7	15.0	15.4							
110	16.0	14.3	12.7	12.1	12.1	13.0	16.8	16.9	16.3	16.1	16.3	16.7							
115	16.8	15.2	13.7	13.1	13.0	13.9	17.5	17.6	17.4	17.4	17.6	17.6							
120	17.5	16.1	14.7	14.0	13.9	14.6	18.0	18.2	18.3	18.4	18.6	18.3							
125	17.9	16.9	15.5	14.8	14.5	15.1	18.5	18.6	19.0	19.3	19.4	19.0							
130	18.6	17.7	16.3	15.5	15.2	15.8	19.3	19.3	19.6	19.8	20.0	19.6							
135	19.6	18.5	17.1	16.2	16.0	16.7	20.3	20.2	20.1	20.3	20.4	20.3							
140	20.8	19.5	18.0	17.1	17.0	17.8	21.4	21.3	20.8	20.7	20.9	21.0							
145	22.0	20.5	18.8	18.0	18.1	19.0	22.5	22.5	21.7	21.3	21.4	21.8							
150	23.2	21.6	19.9	19.2	19.2	20.1	23.6	23.6	22.9	22.1	22.2	22.7							
155	24.2	22.6	21.0	20.4	20.4	21.2	24.4	24.5	24.0	23.2	23.0	23.5							
160	24.9	23.6	22.1	21.7	21.7	22.1	24.9	25.1	24.9	24.2	23.9	24.0							
165	25.3	24.2	23.2	22.9	22.8	22.8	25.2	25.4	25.5	25.1	24.5	24.3							
170	25.5	24.8	24.0	23.9	23.6	23.4	25.5	25.5	25.7	25.6	24.9	24.5							
175	25.6	25.2	24.7	24.7	24.2	23.8	25.7	25.5	25.6	25.6	24.9	24.4							
180	25.6	25.5	25.2	25.2	24.5	24.1	25.8	25.3	25.2	25.2	24.6	24.0							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-08-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks: