
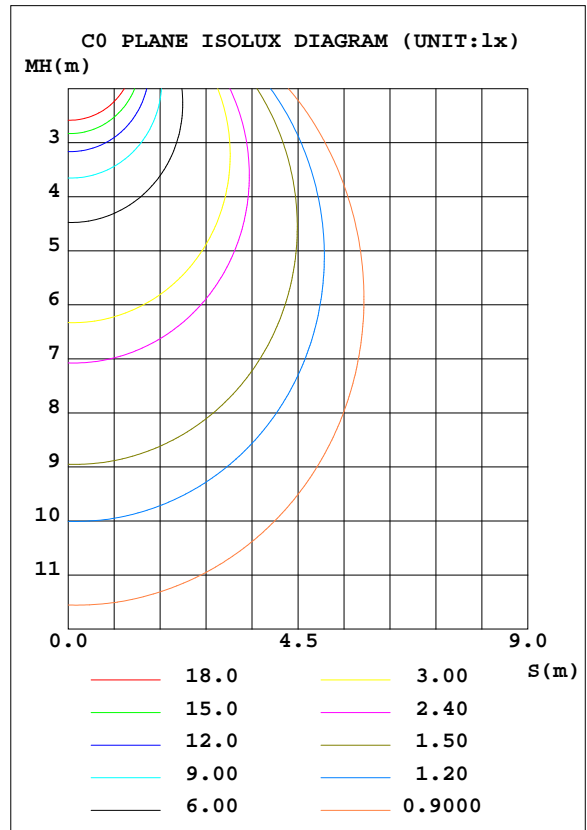


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.35 lm/W			
MODEL	FT-F9002-4000K	I _{max} (cd)	120.3	S/MH(C0/180)	1.30
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	351.66	η UP, DN(C0-180)	0.8, 48.9
NOMINAL FLUX(lm)	351.664	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.9, 49.5
LAMPS INSIDE	1	η up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	232.2	η down(%)	98.4	CIBSE SHR MAX	1.35

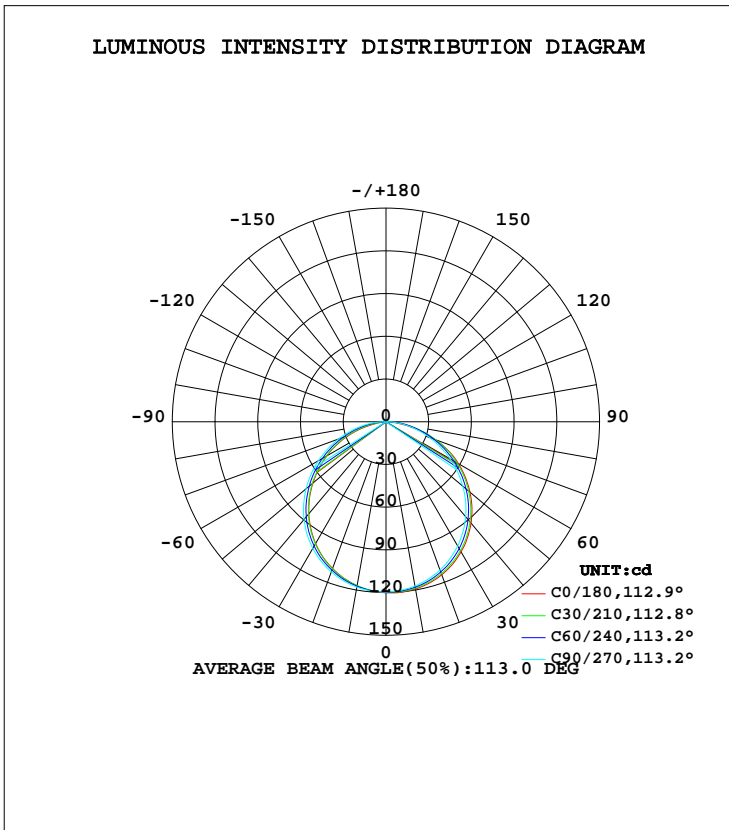

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	119.3	118.4	117.1	116.1	116.9	117.1	117.9	118.7	0- 10	11.33	11.33	3.22,3.22
20	114.4	113.0	110.8	108.9	109.7	110.5	112.3	113.9	10- 20	32.50	43.82	12.5,12.5
30	105.5	103.7	100.7	97.83	98.81	100.1	102.8	105.3	20- 30	49.40	93.23	26.5,26.5
40	92.91	90.75	87.08	83.36	84.34	86.00	89.56	92.93	30- 40	59.72	152.9	43.5,43.5
50	77.04	74.64	70.43	66.09	67.01	68.98	73.25	77.23	40- 50	61.99	214.9	61.1,61.1
60	58.72	56.27	51.88	47.20	47.89	50.11	54.81	59.12	50- 60	56.02	271.0	77.77
70	36.83	36.55	32.68	27.92	27.46	30.69	35.47	39.60	60- 70	43.02	314.0	89.3,89.3
80	13.37	16.78	14.60	9.634	6.471	11.80	16.81	19.28	70- 80	24.79	338.8	96.3,96.3
90	1.475	1.895	0.5507	0.6236	0.5967	0.6822	0.6191	3.573	80- 90	7.102	345.9	98.4,98.4
100	0.5819	0.6018	0.6404	0.6644	0.7009	0.6852	0.6424	0.6518	90-100	0.7785	346.6	98.6,98.6
110	0.6903	0.7018	0.7342	0.7779	0.8135	0.8093	0.7446	0.7436	100-110	0.7380	347.4	98.8,98.8
120	0.8009	0.8177	0.8469	0.8886	0.9408	0.9262	0.8552	0.8532	110-120	0.8044	348.2	99.99
130	0.9177	0.9438	0.9658	1.013	1.072	1.045	0.9698	0.9845	120-130	0.8336	349.0	99.2,99.2
140	1.039	1.063	1.087	1.127	1.177	1.161	1.091	1.091	130-140	0.8113	349.8	99.5,99.5
150	1.160	1.164	1.195	1.214	1.289	1.266	1.203	1.207	140-150	0.7297	350.6	99.7,99.7
160	1.279	1.272	1.302	1.307	1.381	1.365	1.306	1.312	150-160	0.5832	351.1	99.9,99.9
170	1.358	1.355	1.379	1.375	1.423	1.391	1.387	1.378	160-170	0.3820	351.5	100,100
180	1.420	1.399	1.400	1.401	1.420	1.393	1.402	1.400	170-180	0.1324	351.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23

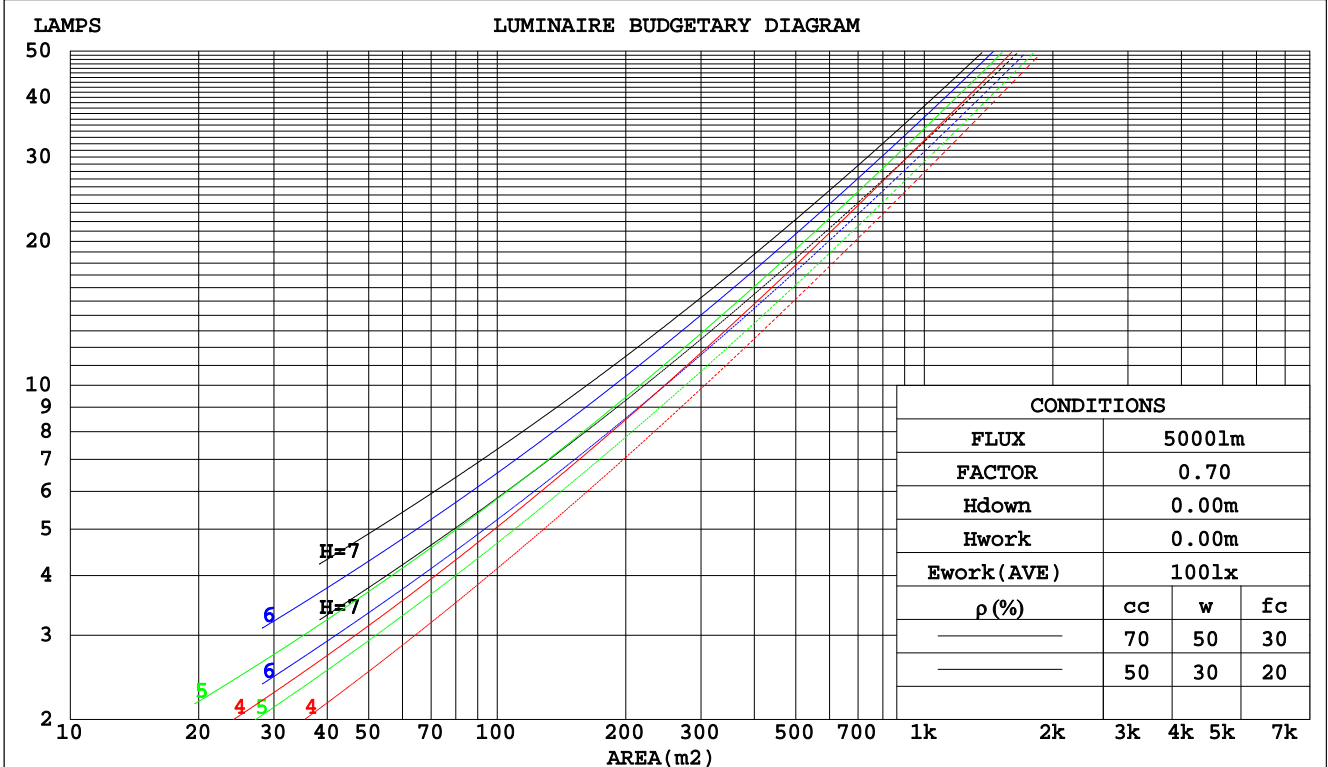

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

WEC AND CCEC

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.174	.055	.290	.166	.053	.277	.160	.051	.265	.154	.050	
2.0	.293	.160	.049	.286	.158	.049	.274	.152	.047	.262	.147	.046	.251	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.254	.137	.042	.243	.133	.041	.234	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.214	.107	.031	.210	.106	.030	.202	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.147	.165	.145	.126	.113	.100	.087	.065	.058	.051	.021	.019	.016	
2.0	.185	.145	.111	.159	.125	.096	.109	.086	.067	.063	.050	.039	.020	.016	.013	
3.0	.177	.127	.087	.152	.110	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.170	.114	.071	.146	.098	.062	.100	.069	.044	.058	.040	.026	.019	.013	.008	
5.0	.162	.104	.060	.139	.090	.052	.096	.063	.037	.056	.037	.022	.018	.012	.007	
6.0	.155	.095	.052	.133	.082	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.128	.077	.040	.088	.054	.029	.051	.032	.017	.017	.010	.006	
8.0	.142	.083	.042	.122	.072	.036	.085	.050	.026	.049	.030	.015	.016	.010	.005	
9.0	.136	.078	.038	.117	.067	.033	.081	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.064	.031	.078	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

Uncorrected UGR Table

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm										
NAME: FT-F9002-4000K					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:		
MFR.:					SUR.:0.08*0.08			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.5	24.3	25.8	26.0	23.6	25.1	23.9	25.3	25.5
3H	25.6	27.0	26.0	27.3	27.6	25.1	26.5	25.4	26.8	27.0
4H	26.3	27.6	26.6	27.9	28.1	25.7	27.0	26.1	27.3	27.6
6H	26.6	27.9	27.0	28.2	28.5	26.2	27.4	26.6	27.7	28.1
8H	26.7	27.9	27.1	28.2	28.5	26.4	27.6	26.7	27.9	28.2
12H	26.7	27.9	27.1	28.2	28.5	26.5	27.6	26.8	27.9	28.3
4H 2H	24.6	25.9	25.0	26.2	26.5	24.3	25.6	24.6	25.9	26.2
3H	26.4	27.6	26.8	27.9	28.3	26.0	27.2	26.4	27.5	27.8
4H	27.2	28.2	27.6	28.6	29.0	26.8	27.8	27.2	28.2	28.6
6H	27.7	28.6	28.1	29.0	29.4	27.4	28.3	27.8	28.7	29.1
8H	27.8	28.7	28.3	29.1	29.5	27.6	28.5	28.0	28.9	29.3
12H	27.9	28.7	28.3	29.1	29.5	27.8	28.6	28.2	29.0	29.4
8H 4H	27.5	28.4	27.9	28.7	29.2	27.1	28.0	27.6	28.4	28.8
6H	28.2	28.9	28.6	29.3	29.8	27.9	28.7	28.4	29.1	29.6
8H	28.4	29.0	28.9	29.5	30.0	28.3	28.9	28.7	29.4	29.8
12H	28.5	29.1	29.0	29.5	30.1	28.5	29.1	29.0	29.5	30.0
12H 4H	27.5	28.3	28.0	28.7	29.2	27.1	27.9	27.6	28.4	28.8
6H	28.2	28.9	28.7	29.3	29.8	28.0	28.7	28.5	29.1	29.6
8H	28.5	29.1	29.0	29.5	30.1	28.4	29.0	28.9	29.4	29.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117 Corrected 351.7 lm Total Lamp Luminous Flux. (8log(F/F0) = -3.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	74	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	102	95	89	99	93	88	95	90	85	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

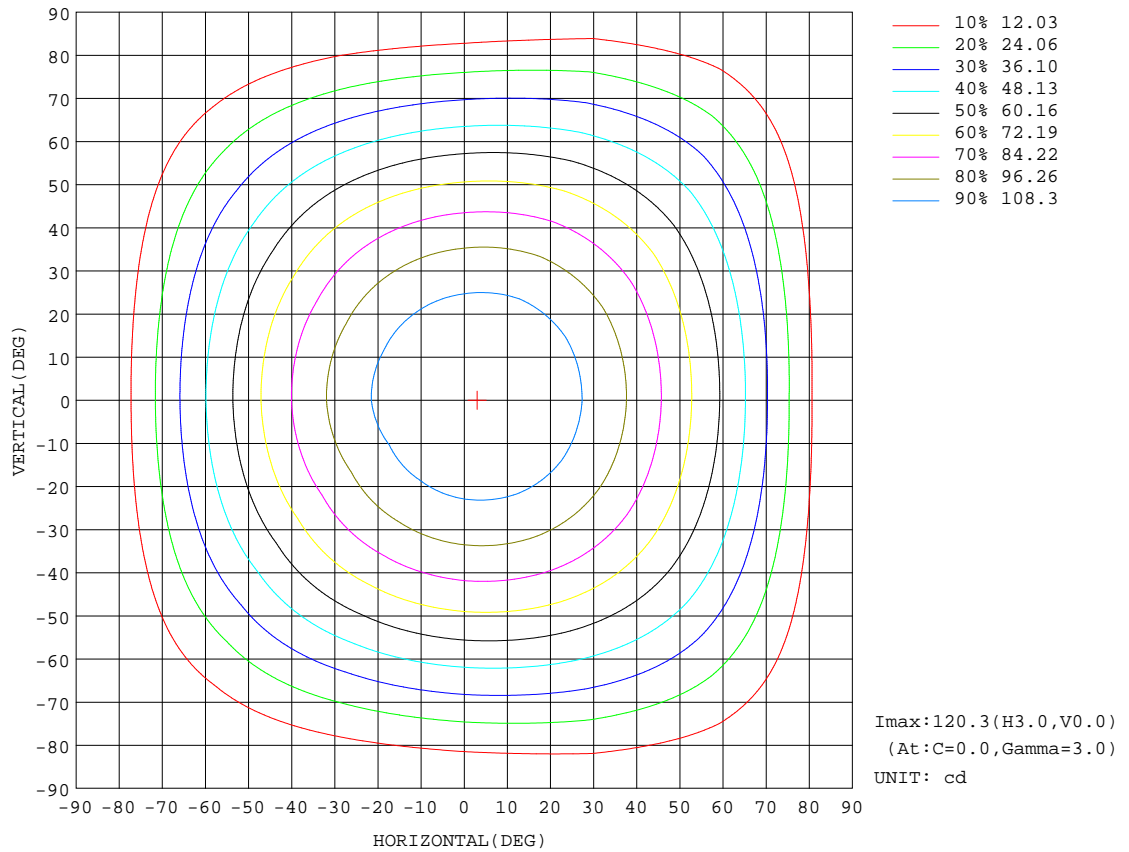


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7312]
 Remarks:

AAI Figure

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

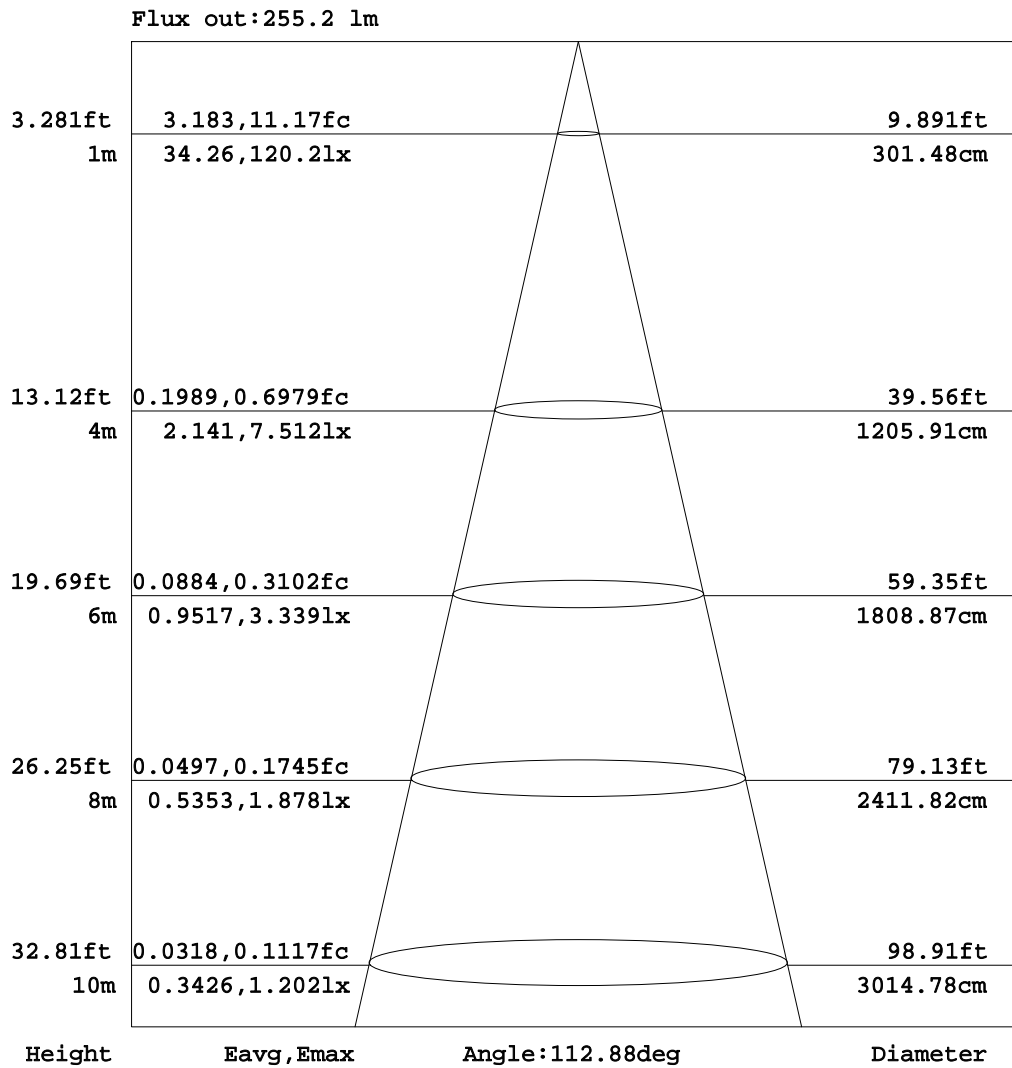


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

ISOLUX DIAGRAM


Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

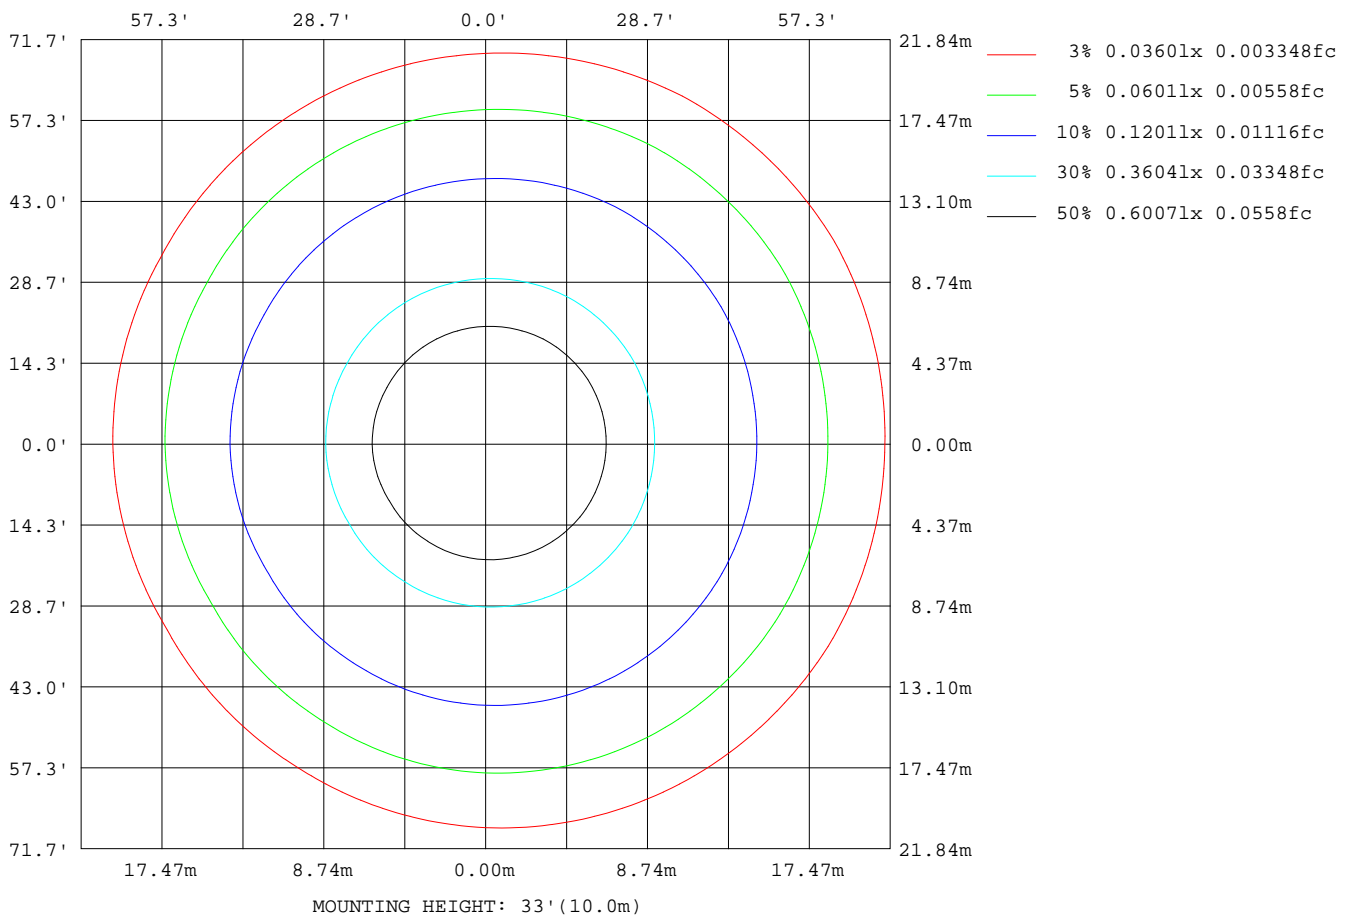

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks:

Planar Illuminance Curve

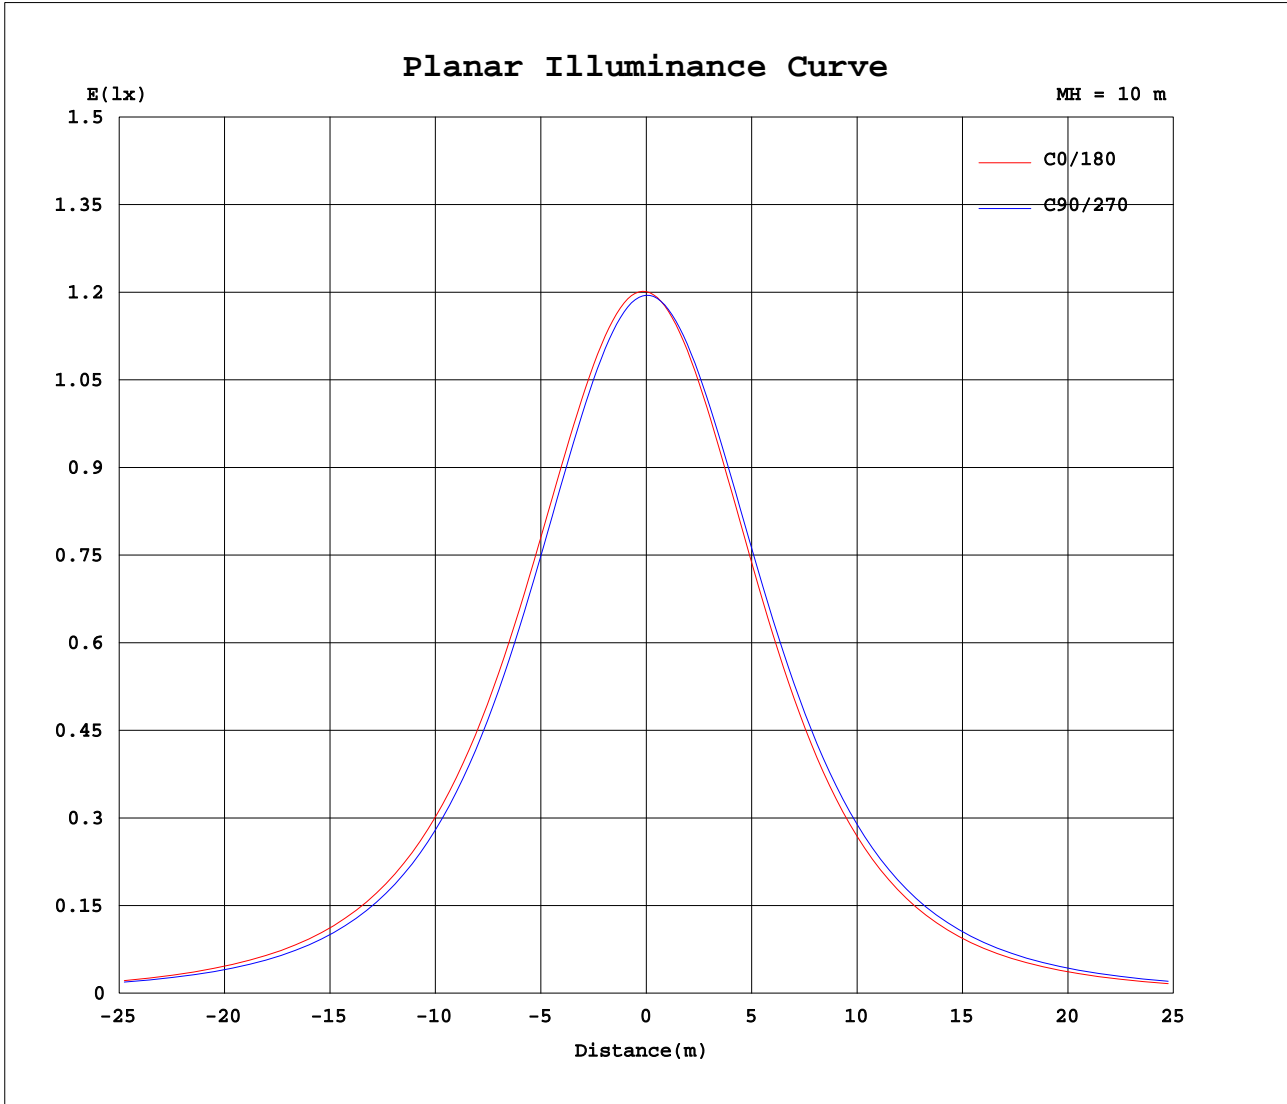

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7312]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:232.2V I:0.0431A P:4.999W PF:0.4990 Lamp Flux:351.664x1 lm		
NAME: FT-F9002-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:0.08*0.08	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	120	120	120	120	119	119	120	120	120	120	119	119							
5	120	120	119	119	118	118	119	119	119	119	119	120							
10	119	119	118	117	116	116	117	117	117	118	119	119							
15	117	117	116	114	113	113	114	114	115	116	117	117							
20	114	114	112	111	109	108	110	110	111	112	114	114							
25	110	110	108	106	104	103	105	105	106	108	110	110							
30	106	105	103	101	98.5	97.2	98.8	99.2	101	103	105	106							
35	99.7	98.6	96.7	94.3	91.7	90.3	92.0	92.4	94.5	96.6	99.1	100							
40	92.9	91.8	89.7	87.1	84.2	82.5	84.3	84.8	87.2	89.6	92.4	93.5							
45	85.3	84.2	81.9	79.0	75.9	74.1	76.0	76.5	79.1	81.8	84.8	86.1							
50	77.0	75.8	73.5	70.4	67.1	65.1	67.0	67.6	70.4	73.2	76.6	77.9							
55	68.1	66.9	64.4	61.3	57.8	55.8	57.6	58.2	61.2	64.2	67.7	69.1							
60	58.7	57.5	55.0	51.9	48.2	46.2	47.9	48.6	51.6	54.8	58.4	59.9							
65	48.6	48.0	45.4	42.3	38.6	36.6	37.9	38.9	41.9	45.1	48.8	50.2							
70	36.8	37.4	35.7	32.7	29.1	26.7	27.5	29.1	32.3	35.5	39.1	40.1							
75	24.8	26.8	26.2	23.4	19.8	16.8	16.8	19.2	22.8	25.9	29.5	29.1							
80	13.4	16.4	17.2	14.6	11.2	8.06	6.47	9.67	13.9	16.8	20.2	18.3							
85	4.31	8.34	8.75	6.32	3.29	1.83	1.37	2.76	5.74	8.28	11.5	9.51							
90	1.47	2.51	1.28	0.55	0.62	0.63	0.60	0.71	0.66	0.62	3.50	3.65							
95	0.54	0.60	0.59	0.58	0.62	0.63	0.65	0.65	0.69	0.60	0.64	0.68							
100	0.58	0.59	0.61	0.64	0.65	0.68	0.70	0.67	0.70	0.64	0.67	0.63							
105	0.63	0.65	0.65	0.69	0.70	0.73	0.75	0.73	0.75	0.68	0.71	0.67							
110	0.69	0.70	0.70	0.73	0.76	0.79	0.81	0.79	0.82	0.74	0.76	0.73							
115	0.75	0.76	0.76	0.79	0.82	0.85	0.88	0.86	0.88	0.80	0.82	0.78							
120	0.80	0.82	0.82	0.85	0.88	0.90	0.94	0.91	0.94	0.86	0.87	0.84							
125	0.86	0.88	0.88	0.91	0.94	0.97	1.01	0.98	1.00	0.91	0.94	0.90							
130	0.92	0.94	0.94	0.97	0.99	1.03	1.07	1.05	1.04	0.97	1.00	0.97							
135	0.98	1.01	0.99	1.03	1.05	1.10	1.13	1.11	1.09	1.03	1.05	1.03							
140	1.04	1.07	1.05	1.09	1.10	1.15	1.18	1.17	1.15	1.09	1.10	1.09							
145	1.10	1.13	1.11	1.14	1.15	1.20	1.24	1.24	1.21	1.15	1.18	1.15							
150	1.16	1.17	1.15	1.20	1.20	1.23	1.29	1.26	1.27	1.20	1.22	1.20							
155	1.22	1.23	1.20	1.25	1.25	1.28	1.33	1.30	1.33	1.25	1.26	1.26							
160	1.28	1.28	1.26	1.30	1.29	1.32	1.38	1.35	1.39	1.31	1.32	1.31							
165	1.33	1.33	1.30	1.35	1.33	1.37	1.41	1.37	1.40	1.35	1.35	1.35							
170	1.36	1.37	1.34	1.38	1.36	1.39	1.42	1.39	1.40	1.39	1.38	1.38							
175	1.39	1.39	1.37	1.40	1.38	1.41	1.42	1.39	1.40	1.39	1.38	1.38							
180	1.42	1.41	1.39	1.40	1.40	1.41	1.42	1.39	1.40	1.40	1.40	1.40							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-10-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.267
 Humidity:65.0%
 Test Distance:8.000m [K=0.7312]
 Remarks: