
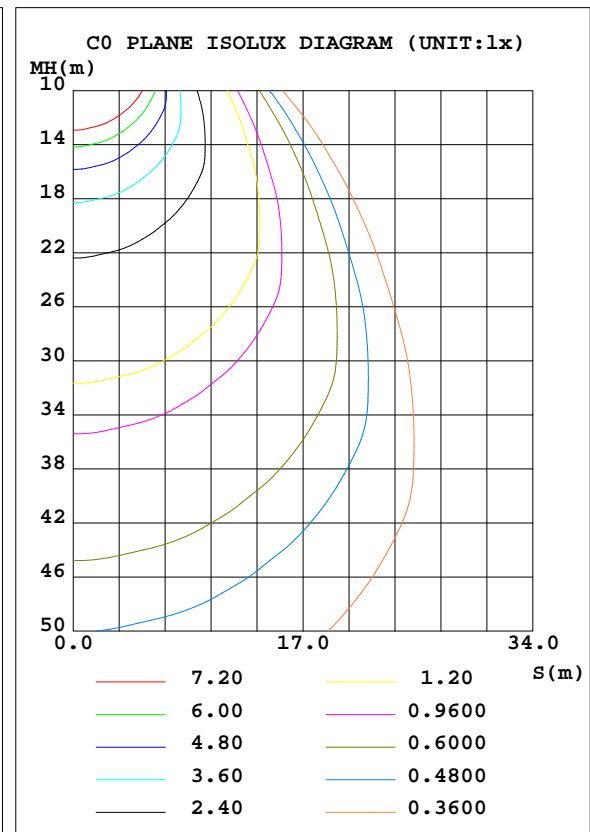


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	F9084-28W-3000K	Imax(cd)	1202	S/MH(C0/180)	1.18
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2227.7	η UP, DN(C0-180)	0.4, 49.4
NOMINAL FLUX(lm)	2227.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3, 49.8
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)		η down(%)	99.3	CIBSE SHR MAX	1.15

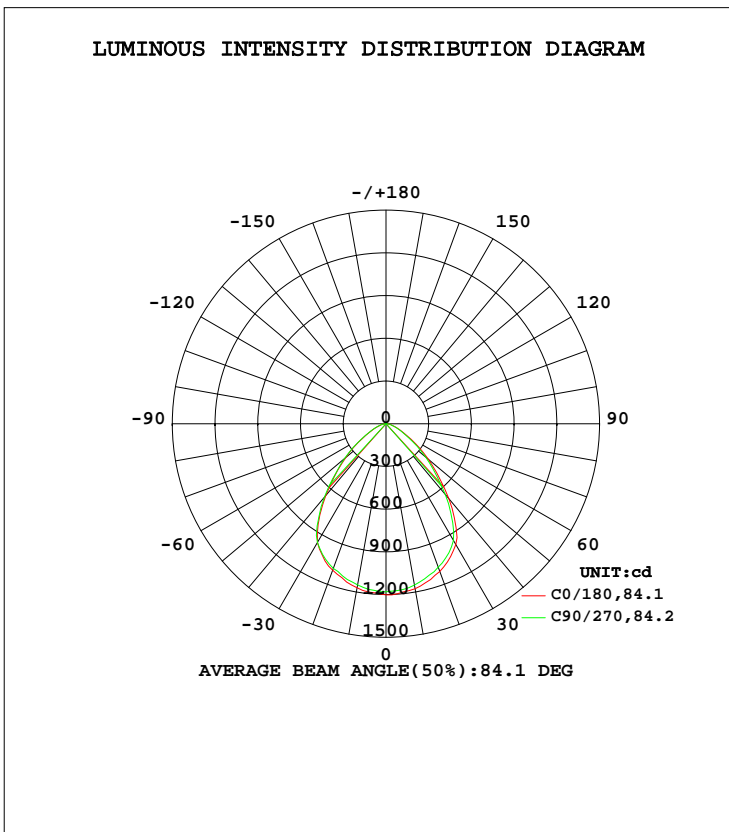

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1177	1163	1150	1141	1170	1160	1150	1147	0- 10	111.7	111.7	5.01,5.01
20	1104	1088	1071	1066	1095	1084	1081	1074	10- 20	317.1	428.7	19.2,19.2
30	980.8	966.2	947.8	931.0	963.1	958.5	963.4	959.3	20- 30	473.8	902.5	40.5,40.5
40	688.7	672.5	646.9	629.6	658.0	661.8	671.4	676.7	30- 40	512.0	1415	63.5,63.5
50	387.5	377.0	365.2	352.0	369.4	371.4	380.1	380.1	40- 50	390.5	1805	81,81
60	174.9	170.7	159.9	155.3	163.9	164.5	170.2	174.0	50- 60	234.4	2039	91.5,91.5
70	74.39	72.97	69.39	66.71	69.36	69.03	71.24	73.68	60- 70	111.1	2151	96.5,96.5
80	29.81	29.38	27.78	26.42	27.41	27.13	28.47	29.58	70- 80	48.22	2199	98.7,98.7
90	0.5991	0.6109	0.6114	0.6365	0.4061	0.3662	0.4464	0.3498	80- 90	12.59	2211	99.3,99.3
100	1.122	1.126	1.147	1.156	0.8086	0.7783	0.8634	0.7235	90-100	0.7797	2212	99.3,99.3
110	1.838	1.836	1.856	1.876	1.434	1.414	1.500	1.345	100-110	1.361	2213	99.4,99.4
120	2.628	2.622	2.635	2.666	2.235	2.189	2.264	2.090	110-120	2.001	2215	99.5,99.5
130	3.421	3.404	3.392	3.434	3.090	3.004	3.127	2.891	120-130	2.522	2218	99.6,99.6
140	4.112	4.081	4.105	4.092	3.865	3.750	3.766	3.637	130-140	2.769	2221	99.7,99.7
150	4.661	4.640	4.643	4.632	4.483	4.409	4.399	4.262	140-150	2.650	2223	99.8,99.8
160	5.213	5.214	5.169	5.207	5.071	5.019	5.035	4.873	150-160	2.216	2226	99.9,99.9
170	5.663	5.660	5.615	5.638	5.612	5.578	5.495	5.454	160-170	1.511	2227	100,100
180	5.875	5.941	5.751	5.838	5.919	5.897	5.784	5.806	170-180	0.5464	2228	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

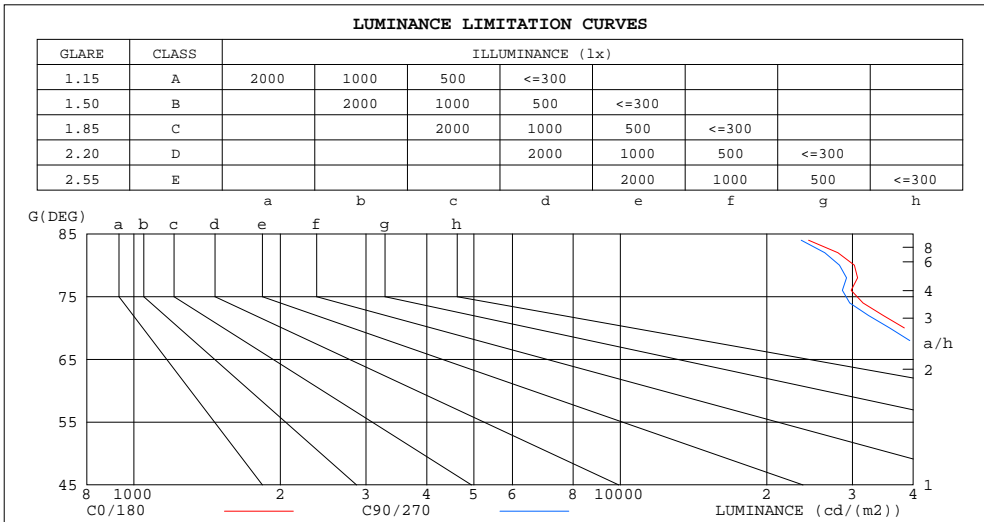

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	29230	28235
80	30278	28211
75	33590	31550
70	38362	35783
65	51671	48116
60	61677	56413
55	90781	83877
50	106314	100190
45	137478	129412


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.84	.81	.85	.82	.79	.78
3.0	.87	.80	.75	.85	.79	.74	.82	.77	.73	.80	.75	.72	.77	.73	.70	.68
4.0	.79	.71	.66	.77	.71	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.72	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.57	.65	.60	.56	.54
6.0	.65	.58	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.59	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.48	.42	.55	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.40
9.0	.51	.44	.39	.50	.43	.39	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

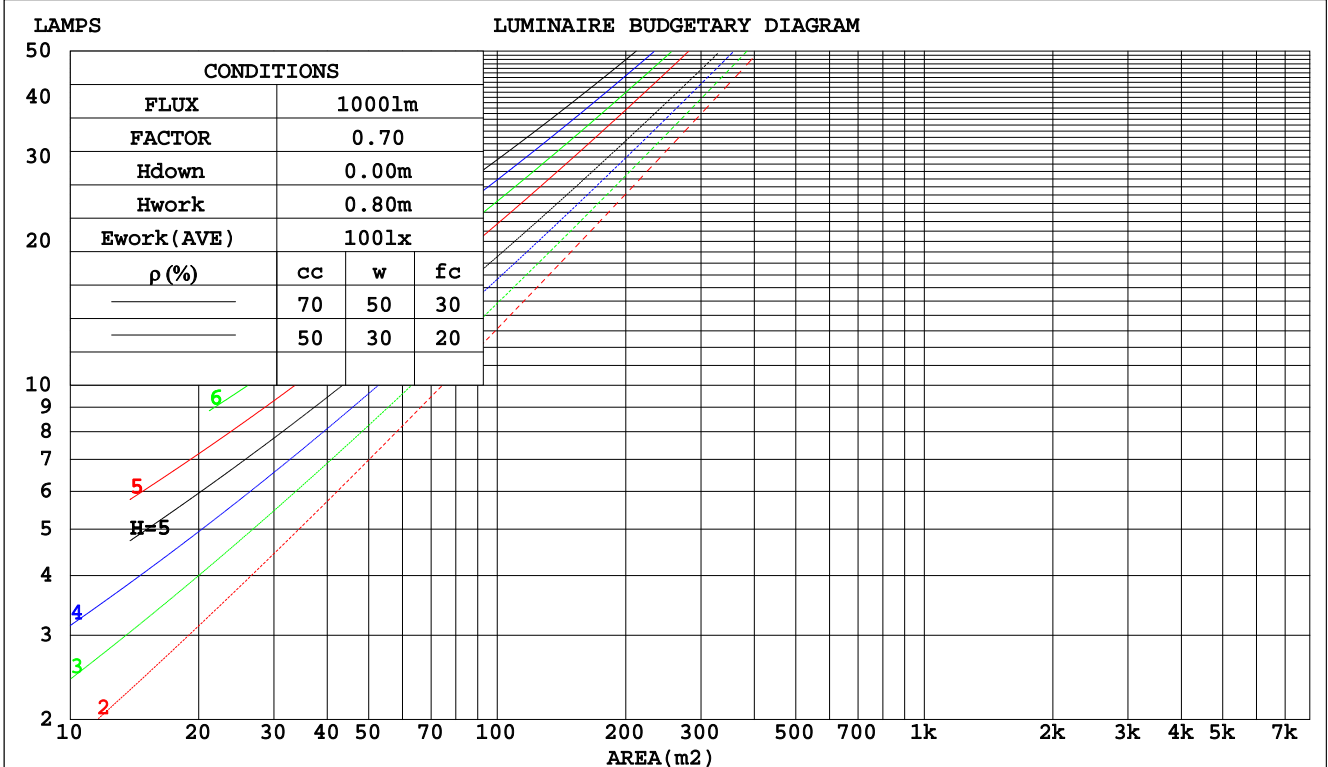

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.241	.137	.043	.234	.133	.042	.220	.126	.040	.208	.120	.039	.197	.114	.037	
2.0	.232	.127	.039	.226	.125	.038	.215	.119	.037	.204	.114	.036	.194	.110	.035	
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.195	.107	.033	.187	.103	.032	
4.0	.208	.108	.032	.203	.106	.031	.194	.103	.031	.186	.100	.030	.178	.097	.029	
5.0	.196	.100	.029	.192	.098	.029	.184	.096	.028	.176	.093	.028	.169	.091	.027	
6.0	.184	.092	.026	.181	.091	.026	.174	.089	.026	.167	.087	.026	.161	.085	.025	
7.0	.174	.086	.024	.171	.085	.024	.164	.083	.024	.159	.081	.024	.153	.079	.023	
8.0	.165	.080	.023	.162	.080	.022	.156	.078	.022	.151	.076	.022	.146	.075	.022	
9.0	.156	.075	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	.139	.070	.020	
10.0	.148	.071	.020	.145	.070	.020	.141	.069	.019	.136	.068	.019	.132	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.181	.162	.145	.155	.139	.125	.106	.096	.087	.061	.055	.050	.020	.018	.016	
2.0	.170	.138	.111	.146	.119	.096	.100	.082	.067	.058	.048	.039	.018	.015	.013	
3.0	.161	.120	.087	.138	.103	.075	.095	.072	.053	.055	.042	.031	.018	.014	.010	
4.0	.152	.106	.070	.131	.091	.061	.090	.064	.043	.052	.037	.025	.017	.012	.008	
5.0	.145	.095	.058	.124	.082	.051	.086	.057	.036	.050	.034	.021	.016	.011	.007	
6.0	.138	.086	.049	.119	.075	.043	.082	.052	.030	.048	.031	.018	.015	.010	.006	
7.0	.132	.079	.042	.113	.069	.037	.078	.048	.026	.046	.028	.016	.015	.009	.005	
8.0	.126	.073	.037	.109	.064	.032	.075	.045	.023	.044	.026	.014	.014	.009	.005	
9.0	.121	.068	.033	.104	.059	.029	.072	.042	.021	.042	.025	.012	.014	.008	.004	
10.0	.116	.064	.030	.100	.056	.026	.069	.039	.019	.040	.023	.011	.013	.008	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	25.9	24.8	26.1	26.3	24.3	25.6	24.6	25.8	26.0
3H	24.9	26.1	25.2	26.3	26.6	24.6	25.8	24.9	26.1	26.3
4H	25.0	26.1	25.3	26.4	26.6	24.7	25.8	25.0	26.1	26.3
6H	25.1	26.1	25.4	26.4	26.7	24.8	25.9	25.1	26.1	26.4
8H	25.1	26.1	25.5	26.4	26.7	24.8	25.8	25.2	26.1	26.4
12H	25.1	26.1	25.5	26.4	26.7	24.8	25.8	25.2	26.1	26.4
4H 2H	24.7	25.8	25.0	26.0	26.3	24.4	25.6	24.8	25.8	26.1
3H	25.1	26.1	25.5	26.4	26.7	24.9	25.9	25.3	26.2	26.5
4H	25.3	26.2	25.7	26.5	26.8	25.1	25.9	25.4	26.3	26.6
6H	25.5	26.3	25.9	26.6	27.0	25.2	26.0	25.6	26.4	26.7
8H	25.5	26.3	26.0	26.6	27.0	25.3	26.0	25.7	26.4	26.8
12H	25.6	26.2	26.0	26.6	27.0	25.3	26.0	25.7	26.4	26.8
8H 4H	25.3	26.0	25.7	26.4	26.8	25.1	25.8	25.5	26.2	26.6
6H	25.6	26.2	26.0	26.6	27.0	25.4	25.9	25.8	26.3	26.8
8H	25.7	26.2	26.2	26.6	27.1	25.5	26.0	25.9	26.4	26.9
12H	25.8	26.2	26.2	26.7	27.1	25.5	26.0	26.0	26.4	26.9
12H 4H	25.3	25.9	25.7	26.3	26.7	25.1	25.7	25.5	26.1	26.5
6H	25.6	26.1	26.1	26.5	27.0	25.4	25.9	25.8	26.3	26.8
8H	25.7	26.2	26.2	26.6	27.1	25.5	25.9	26.0	26.4	26.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.8 / - 1.0					+ 0.8 / - 1.1				
1.5H	+ 0.6 / - 0.5					+ 0.6 / - 0.6				
2.0H	+ 1.7 / - 1.6					+ 1.7 / - 1.5				

CIE Pub.117, 2228 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.8)
 Area: 0.00567 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	59	53	68	59	53	67	58	53	47
0.80	78	69	63	77	68	63	76	68	62	57
1.00	86	77	71	85	77	71	83	77	71	65
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	89	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	86
4.00	110	105	102	107	104	100	103	100	98	89
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

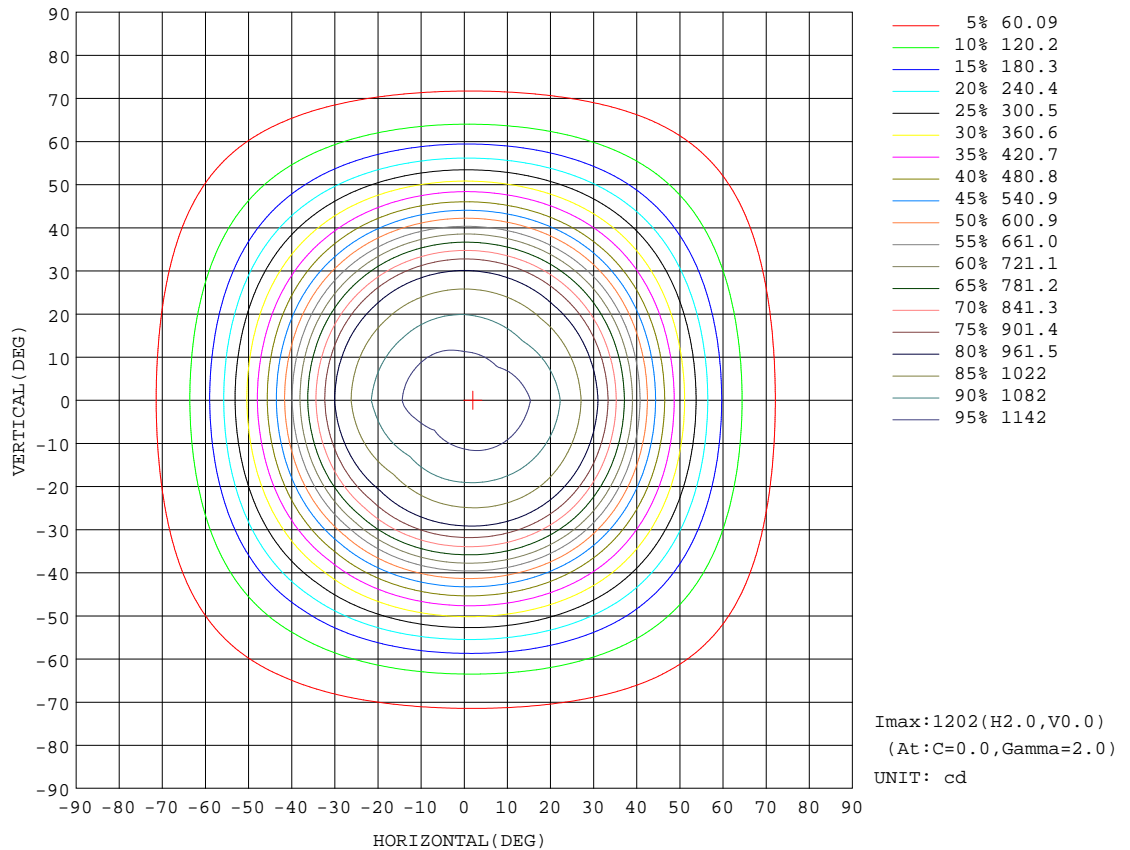


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

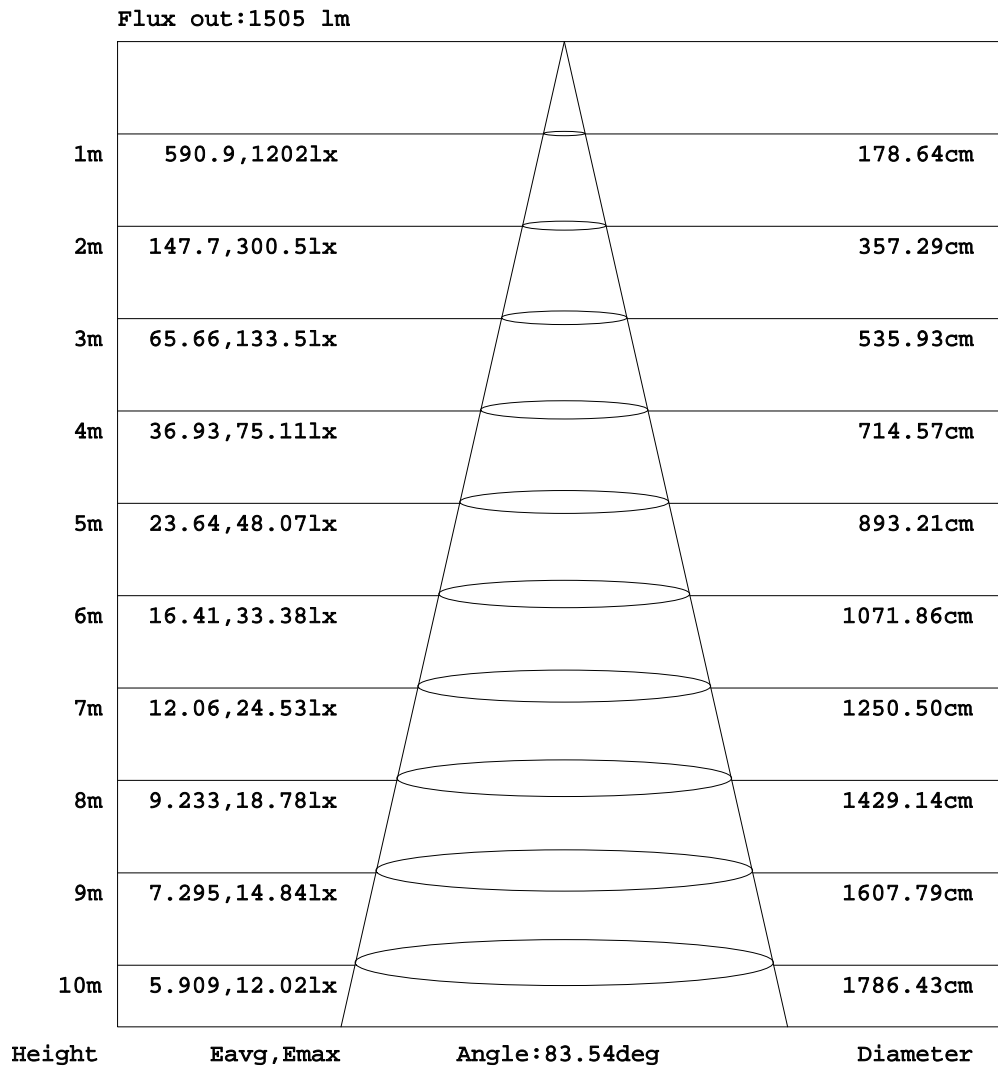


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

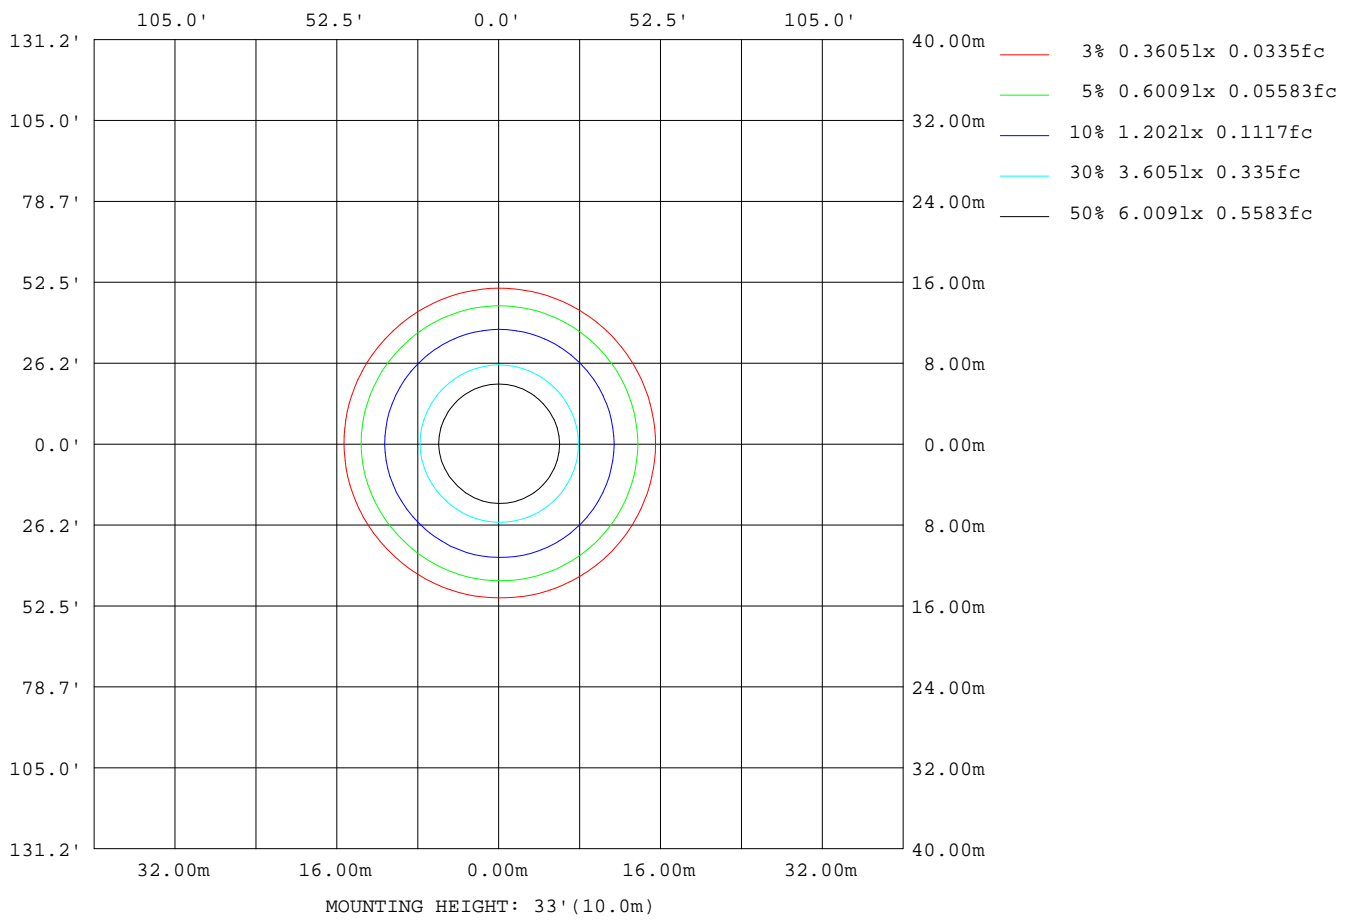

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	46385
L_0~180(75)av	29645
L_0~180(85)av	19558
L_90~270(65)av	45284
L_90~270(75)av	29069
L_90~270(85)av	22306
L_45(65)av	45461
L_45(75)av	29109
L_45(85)av	22232

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

Planar Illuminance Curve

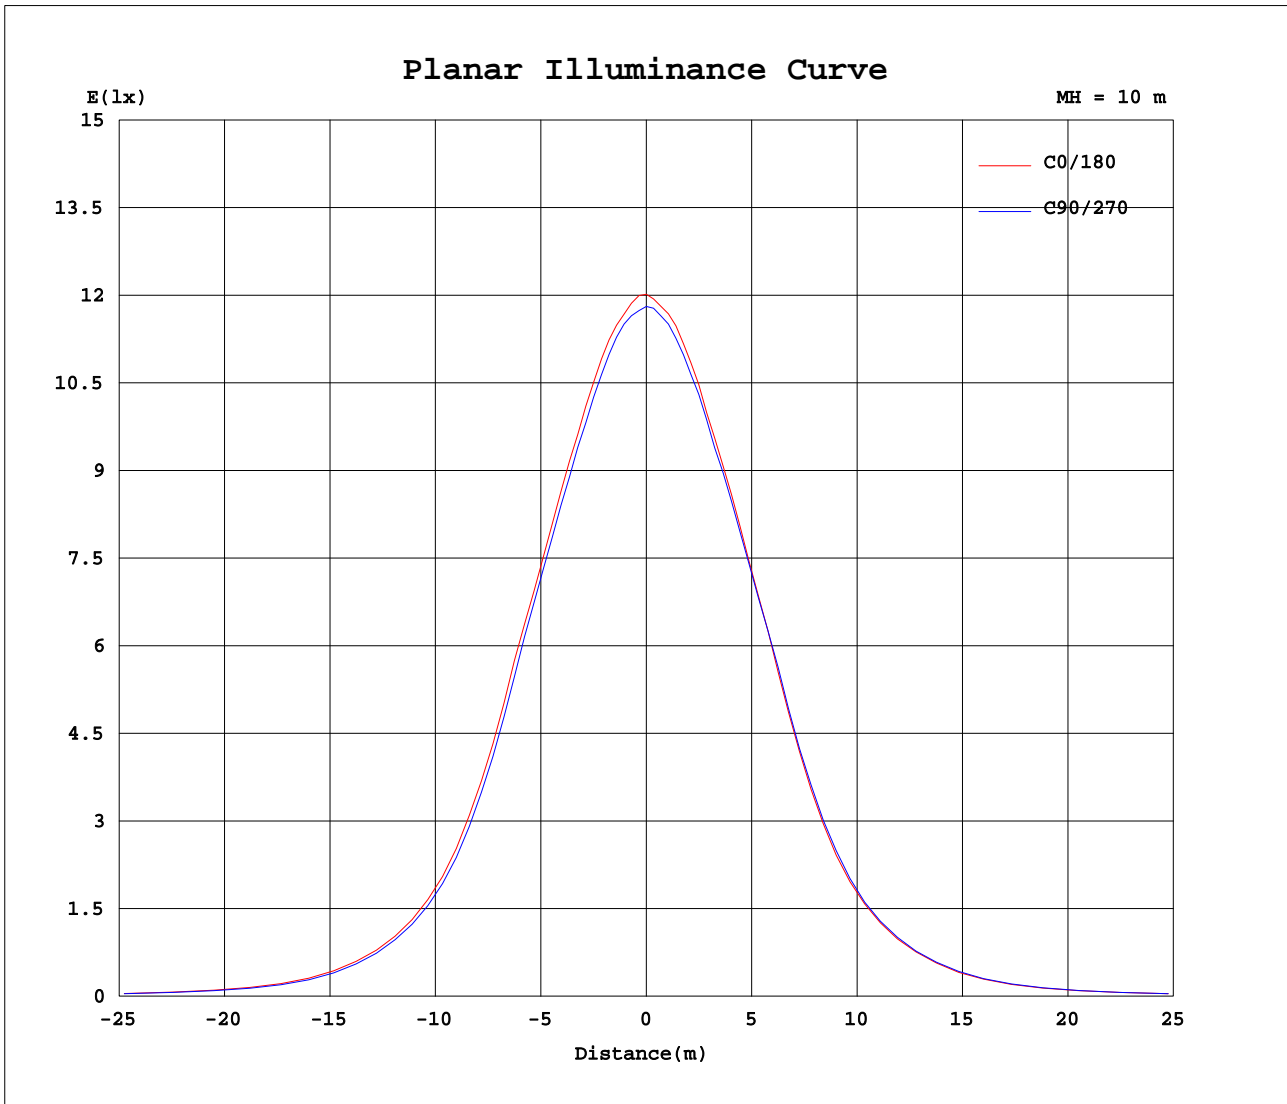

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.29V I:0.1384A P:28.927W PF:0.9484 Freq:50.01Hz Lamp Flux:2227.68x1 lm		
NAME: F9084-28W-3000K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	1202	1191	1181	1172	1202	1191	1181	1172											
5	1195	1184	1174	1162	1190	1183	1173	1167											
10	1177	1163	1150	1141	1170	1160	1150	1147											
15	1151	1138	1123	1113	1146	1135	1128	1122											
20	1104	1088	1071	1066	1095	1084	1081	1074											
25	1062	1050	1032	1016	1054	1040	1042	1039											
30	981	966	948	931	963	958	963	959											
35	881	867	840	827	854	851	865	867											
40	689	673	647	630	658	662	671	677											
45	551	536	519	506	527	529	542	547											
50	387	377	365	352	369	371	380	380											
55	295	286	273	265	281	279	288	291											
60	175	171	160	155	164	165	170	174											
65	124	121	115	111	116	117	120	122											
70	74.4	73.0	69.4	66.7	69.4	69.0	71.2	73.7											
75	49.3	48.2	46.3	44.3	45.9	45.4	47.0	48.6											
80	29.8	29.4	27.8	26.4	27.4	27.1	28.5	29.6											
85	14.4	15.4	14.0	12.6	12.4	13.3	14.6	15.7											
90	0.60	0.61	0.61	0.64	0.41	0.37	0.45	0.35											
95	0.77	0.79	0.80	0.82	0.54	0.50	0.59	0.46											
100	1.12	1.13	1.15	1.16	0.81	0.78	0.86	0.72											
105	1.38	1.38	1.41	1.42	1.05	1.02	1.11	0.96											
110	1.84	1.84	1.86	1.88	1.43	1.41	1.50	1.34											
115	2.15	2.15	2.16	2.19	1.74	1.71	1.80	1.63											
120	2.63	2.62	2.64	2.67	2.23	2.19	2.26	2.09											
125	2.95	2.94	2.95	2.98	2.58	2.51	2.57	2.41											
130	3.42	3.40	3.39	3.43	3.09	3.00	3.13	2.89											
135	3.71	3.70	3.69	3.73	3.42	3.33	3.41	3.21											
140	4.11	4.08	4.10	4.09	3.87	3.75	3.77	3.64											
145	4.35	4.32	4.34	4.33	4.13	4.02	4.03	3.89											
150	4.66	4.64	4.64	4.63	4.48	4.41	4.40	4.26											
155	4.88	4.86	4.85	4.84	4.71	4.65	4.67	4.50											
160	5.21	5.21	5.17	5.21	5.07	5.02	5.03	4.87											
165	5.44	5.45	5.41	5.45	5.27	5.21	5.21	5.08											
170	5.66	5.66	5.62	5.64	5.61	5.58	5.50	5.45											
175	5.83	5.89	5.75	5.82	5.76	5.77	5.63	5.64											
180	5.88	5.94	5.75	5.84	5.92	5.90	5.78	5.81											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks: