
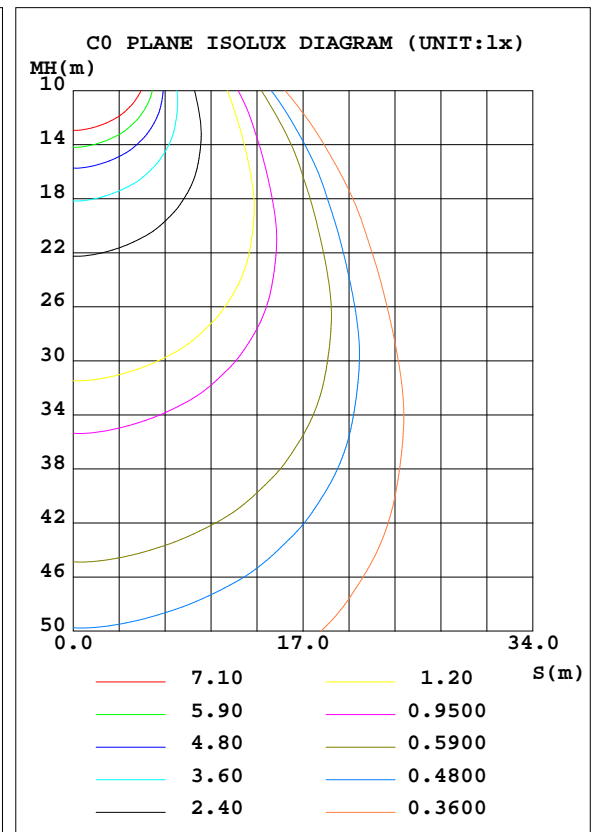


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.11 lm/W			
MODEL	F9084-28W-5700K	I _{max} (cd)	1190	S/MH(C0/180)	1.15
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2183.0	η UP, DN(C0-180)	0.4,49.5
NOMINAL FLUX(lm)	2182.95	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3,49.8
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)		η down(%)	99.3	CIBSE SHR MAX	1.15

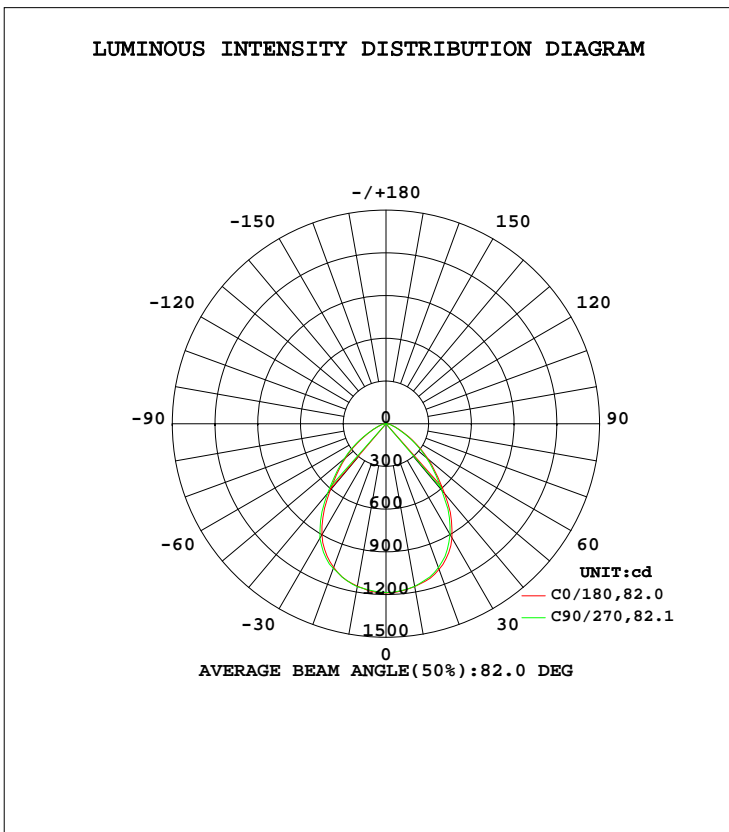

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1161	1165	1159	1157	1158	1158	1162	1165	0- 10	111.9	111.9	5.13,5.13
20	1089	1085	1076	1063	1074	1081	1082	1094	10- 20	317.9	429.8	19.7,19.7
30	926.8	914.1	899.1	889.3	899.9	905.4	928.7	929.6	20- 30	463.2	893.0	40.9,40.9
40	640.3	633.1	609.2	596.9	608.7	616.8	639.0	648.7	30- 40	482.9	1376	63,63
50	388.6	381.6	371.0	362.0	368.9	373.1	383.6	389.2	40- 50	380.1	1756	80.4,80.4
60	185.8	181.0	170.5	167.2	171.1	173.0	180.8	185.7	50- 60	244.0	2000	91.6,91.6
70	68.44	67.73	65.04	62.92	63.72	63.69	66.36	69.10	60- 70	111.4	2111	96.7,96.7
80	26.70	26.66	25.54	24.58	24.79	24.79	25.97	26.83	70- 80	44.07	2156	98.7,98.7
90	0.6059	0.6218	0.6222	0.6511	0.3586	0.3332	0.4354	0.3238	80- 90	11.57	2167	99.3,99.3
100	1.100	1.108	1.151	1.159	0.7244	0.6979	0.8122	0.6613	90-100	0.7542	2168	99.3,99.3
110	1.783	1.796	1.845	1.869	1.280	1.286	1.405	1.239	100-110	1.301	2169	99.4,99.4
120	2.565	2.589	2.628	2.662	2.041	2.021	2.143	1.948	110-120	1.919	2171	99.5,99.5
130	3.355	3.361	3.399	3.441	2.860	2.811	2.999	2.730	120-130	2.433	2174	99.6,99.6
140	4.061	4.029	4.116	4.113	3.627	3.567	3.595	3.480	130-140	2.691	2176	99.7,99.7
150	4.599	4.589	4.639	4.658	4.231	4.229	4.249	4.131	140-150	2.586	2179	99.8,99.8
160	5.107	5.119	5.158	5.177	4.841	4.851	4.881	4.771	150-160	2.169	2181	99.9,99.9
170	5.469	5.473	5.498	5.532	5.327	5.385	5.312	5.311	160-170	1.471	2182	100,100
180	5.630	5.711	5.590	5.685	5.623	5.703	5.601	5.685	170-180	0.5283	2183	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

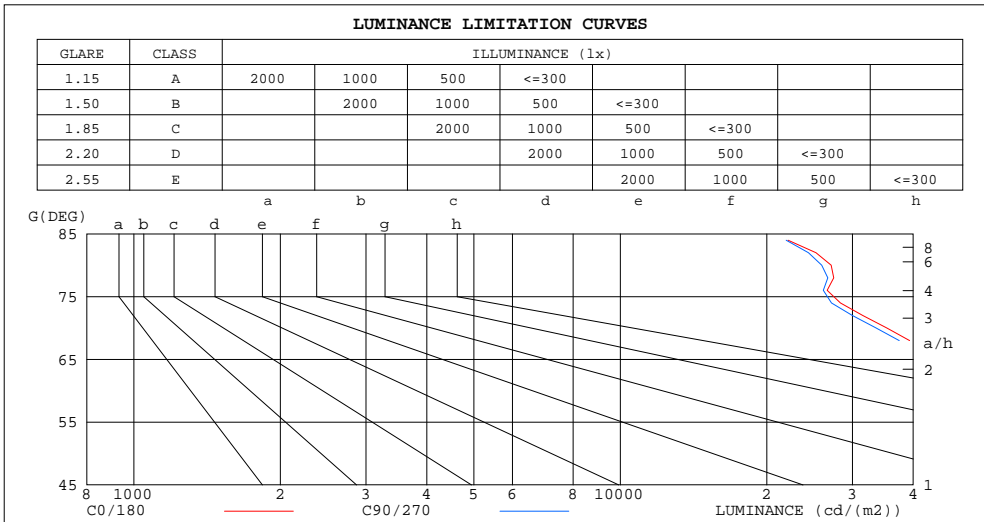

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	26541	26297
80	27122	25939
75	30187	28940
70	35294	33539
65	52081	48445
60	65534	60124
55	93050	87714
50	106632	101800
45	131187	126522


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.84	.81	.85	.82	.79	.78
3.0	.87	.80	.75	.85	.79	.74	.82	.77	.73	.80	.75	.72	.77	.74	.70	.68
4.0	.79	.71	.66	.77	.71	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.72	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.57	.65	.60	.56	.54
6.0	.65	.58	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.59	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.48	.42	.55	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.40
9.0	.51	.44	.39	.51	.43	.39	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.48	.40	.36	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

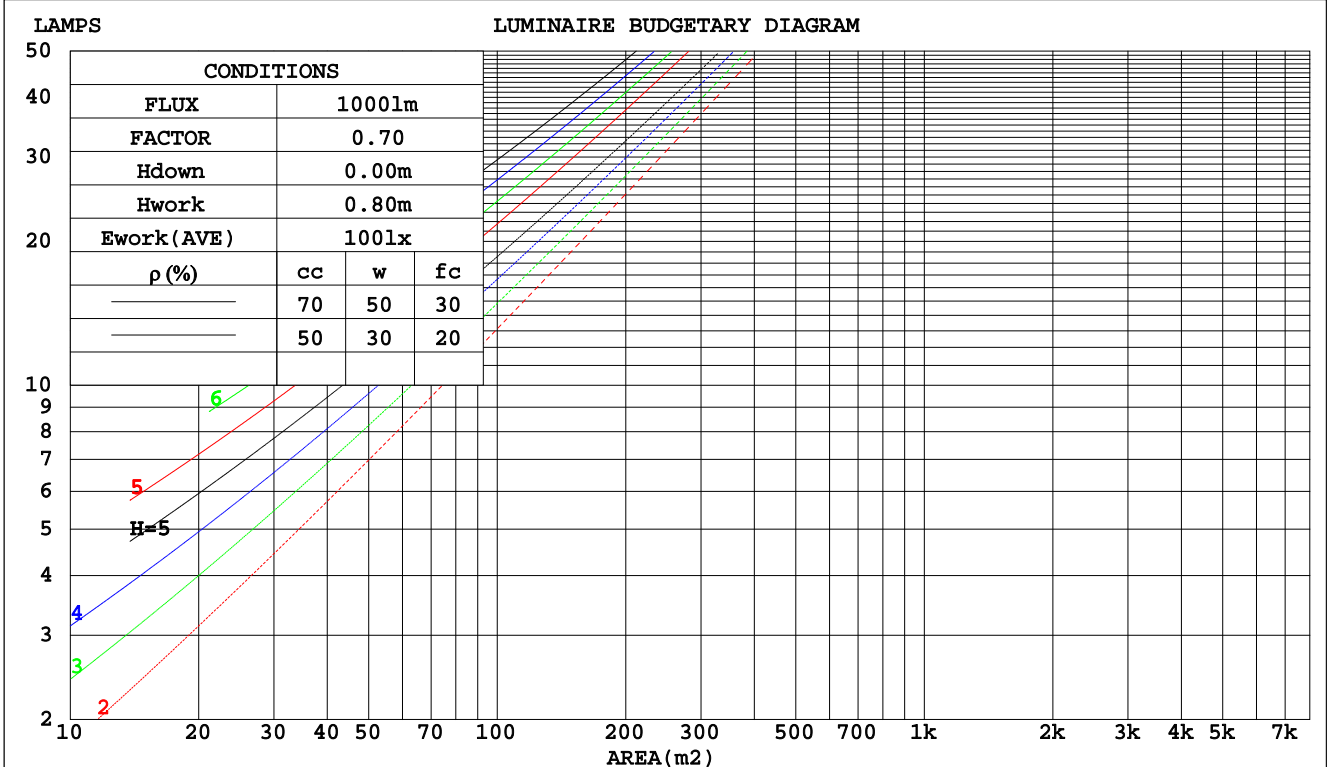

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.240	.137	.043	.233	.133	.042	.220	.126	.040	.208	.120	.038	.196	.114	.037	
2.0	.232	.127	.039	.226	.125	.038	.215	.119	.037	.204	.114	.036	.194	.110	.035	
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.195	.107	.033	.187	.103	.032	
4.0	.208	.108	.032	.203	.106	.031	.194	.103	.031	.186	.100	.030	.178	.097	.029	
5.0	.196	.100	.029	.192	.098	.029	.184	.096	.028	.176	.093	.028	.169	.091	.027	
6.0	.184	.092	.026	.181	.091	.026	.174	.089	.026	.167	.087	.026	.161	.085	.025	
7.0	.174	.086	.024	.171	.085	.024	.164	.083	.024	.159	.081	.024	.153	.079	.023	
8.0	.164	.080	.023	.162	.080	.022	.156	.078	.022	.151	.076	.022	.146	.075	.022	
9.0	.156	.075	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	.139	.070	.020	
10.0	.148	.071	.020	.145	.070	.020	.141	.069	.019	.136	.068	.019	.132	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.181	.162	.145	.155	.139	.125	.106	.096	.087	.061	.055	.050	.020	.018	.016	
2.0	.170	.138	.111	.146	.119	.096	.100	.082	.067	.058	.048	.039	.018	.015	.013	
3.0	.161	.120	.087	.138	.103	.075	.094	.072	.053	.055	.042	.031	.018	.014	.010	
4.0	.152	.106	.070	.131	.091	.061	.090	.064	.043	.052	.037	.025	.017	.012	.008	
5.0	.145	.095	.058	.124	.082	.050	.086	.057	.036	.050	.034	.021	.016	.011	.007	
6.0	.138	.086	.049	.119	.075	.043	.082	.052	.030	.048	.031	.018	.015	.010	.006	
7.0	.132	.079	.042	.113	.069	.037	.078	.048	.026	.046	.028	.016	.015	.009	.005	
8.0	.126	.073	.037	.108	.064	.032	.075	.045	.023	.044	.026	.014	.014	.009	.005	
9.0	.121	.068	.033	.104	.059	.029	.072	.042	.020	.042	.025	.012	.014	.008	.004	
10.0	.115	.064	.030	.100	.056	.026	.069	.039	.019	.040	.023	.011	.013	.008	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.0	25.0	26.2	26.4	24.5	25.8	24.8	26.0	26.2
3H	25.0	26.2	25.3	26.4	26.7	24.8	26.0	25.1	26.2	26.4
4H	25.1	26.2	25.4	26.4	26.7	24.8	26.0	25.2	26.2	26.5
6H	25.1	26.2	25.5	26.4	26.7	24.9	25.9	25.2	26.2	26.5
8H	25.1	26.1	25.5	26.4	26.7	24.9	25.9	25.3	26.2	26.5
12H	25.1	26.1	25.5	26.4	26.7	24.9	25.9	25.3	26.2	26.5
4H 2H	24.8	26.0	25.2	26.2	26.5	24.7	25.8	25.0	26.0	26.3
3H	25.2	26.2	25.6	26.5	26.8	25.0	26.0	25.4	26.3	26.6
4H	25.4	26.2	25.7	26.5	26.9	25.2	26.0	25.5	26.3	26.7
6H	25.5	26.3	25.9	26.6	27.0	25.3	26.1	25.7	26.4	26.8
8H	25.5	26.2	26.0	26.6	27.0	25.3	26.0	25.7	26.4	26.8
12H	25.5	26.2	26.0	26.6	27.0	25.4	26.0	25.8	26.4	26.8
8H 4H	25.3	26.1	25.8	26.4	26.8	25.2	25.9	25.6	26.2	26.6
6H	25.6	26.1	26.0	26.6	27.0	25.4	25.9	25.8	26.4	26.8
8H	25.7	26.2	26.1	26.6	27.1	25.5	26.0	25.9	26.4	26.9
12H	25.7	26.1	26.2	26.6	27.1	25.5	26.0	26.0	26.4	26.9
12H 4H	25.3	26.0	25.8	26.4	26.8	25.1	25.8	25.6	26.2	26.6
6H	25.6	26.1	26.0	26.5	27.0	25.4	25.9	25.8	26.3	26.8
8H	25.7	26.1	26.2	26.6	27.0	25.5	25.9	26.0	26.4	26.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.7 / - 1.0					+ 0.7 / - 1.0				
1.5H	+ 0.3 / - 0.5					+ 0.3 / - 0.4				
2.0H	+ 1.5 / - 1.7					+ 1.5 / - 1.7				

CIE Pub.117, 2183 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.7)
 Area: 0.00567 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	53	67	58	52	66	58	52	47
0.80	78	69	63	77	68	62	75	67	62	56
1.00	86	77	71	85	76	71	83	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	89	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	96	92	88	81
2.50	104	98	94	102	97	93	99	94	91	83
3.00	107	102	97	105	100	96	101	97	94	86
4.00	110	105	102	107	104	100	103	100	98	89
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

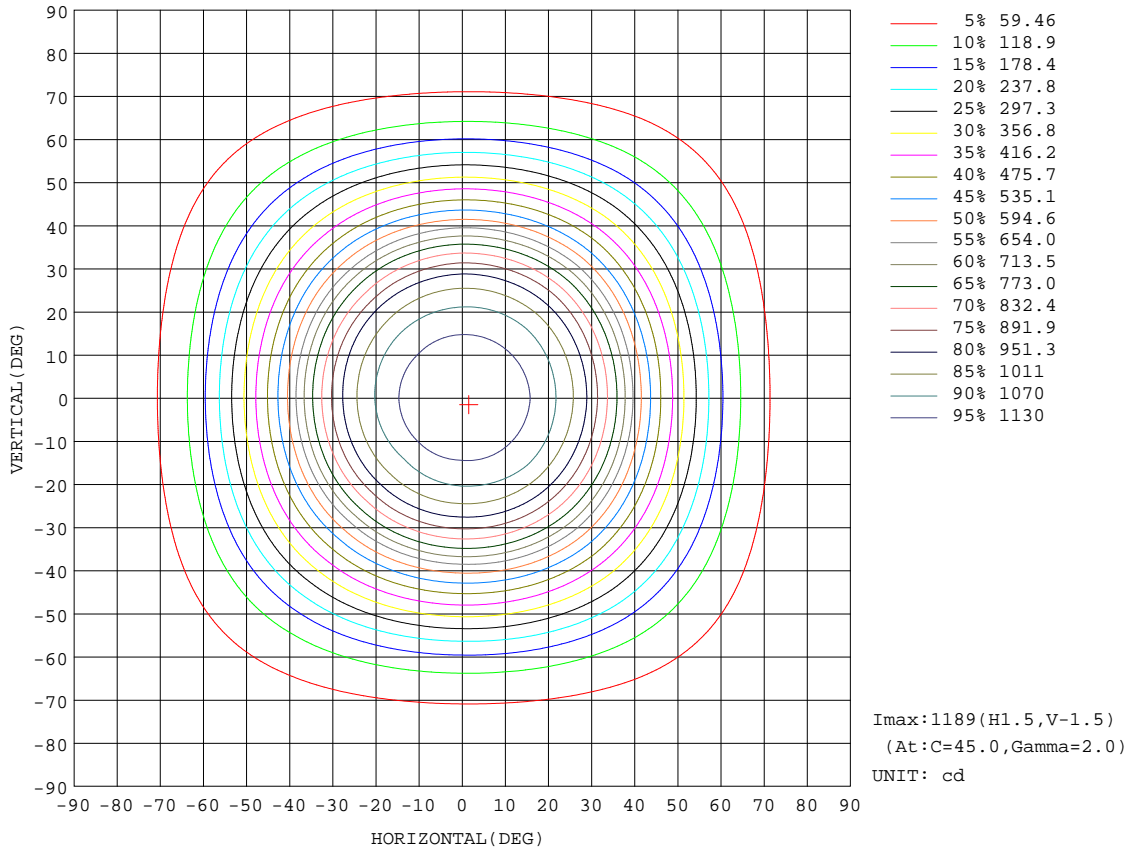


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

Flux out:1462 lm

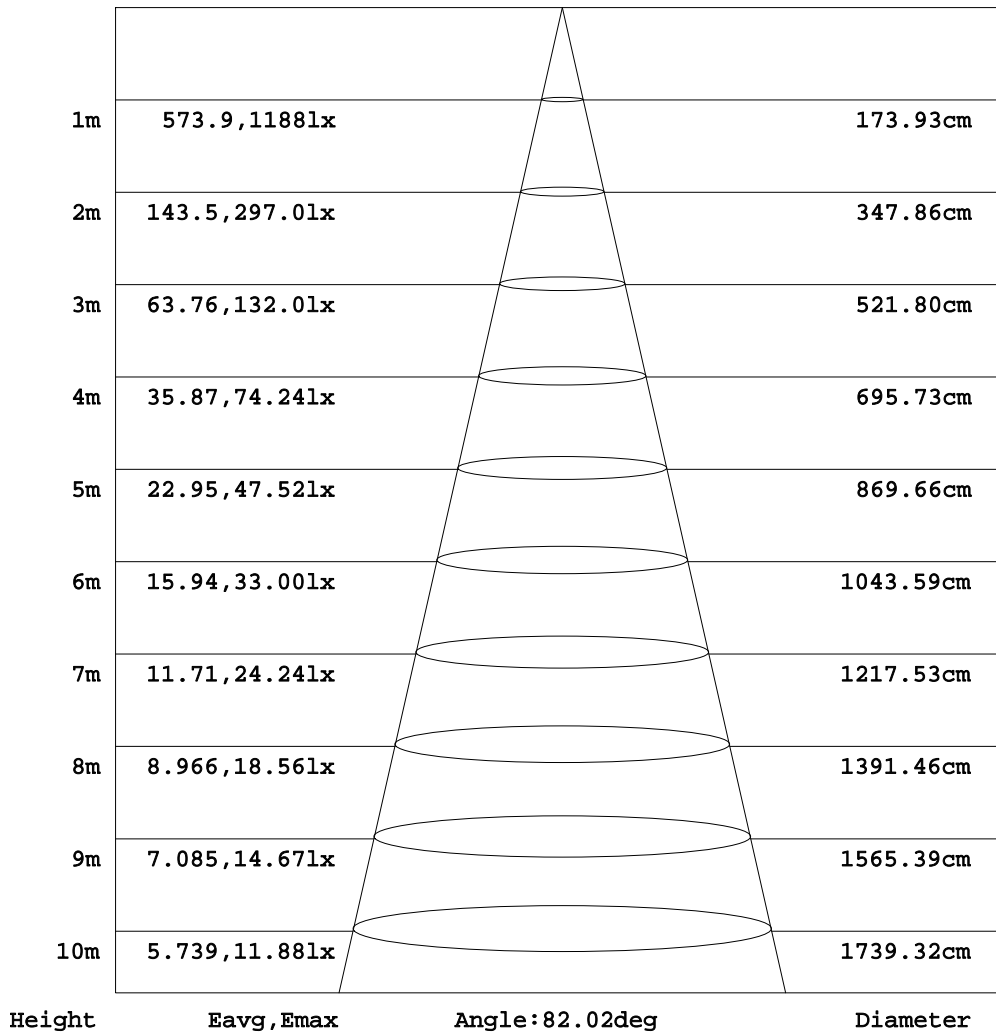


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

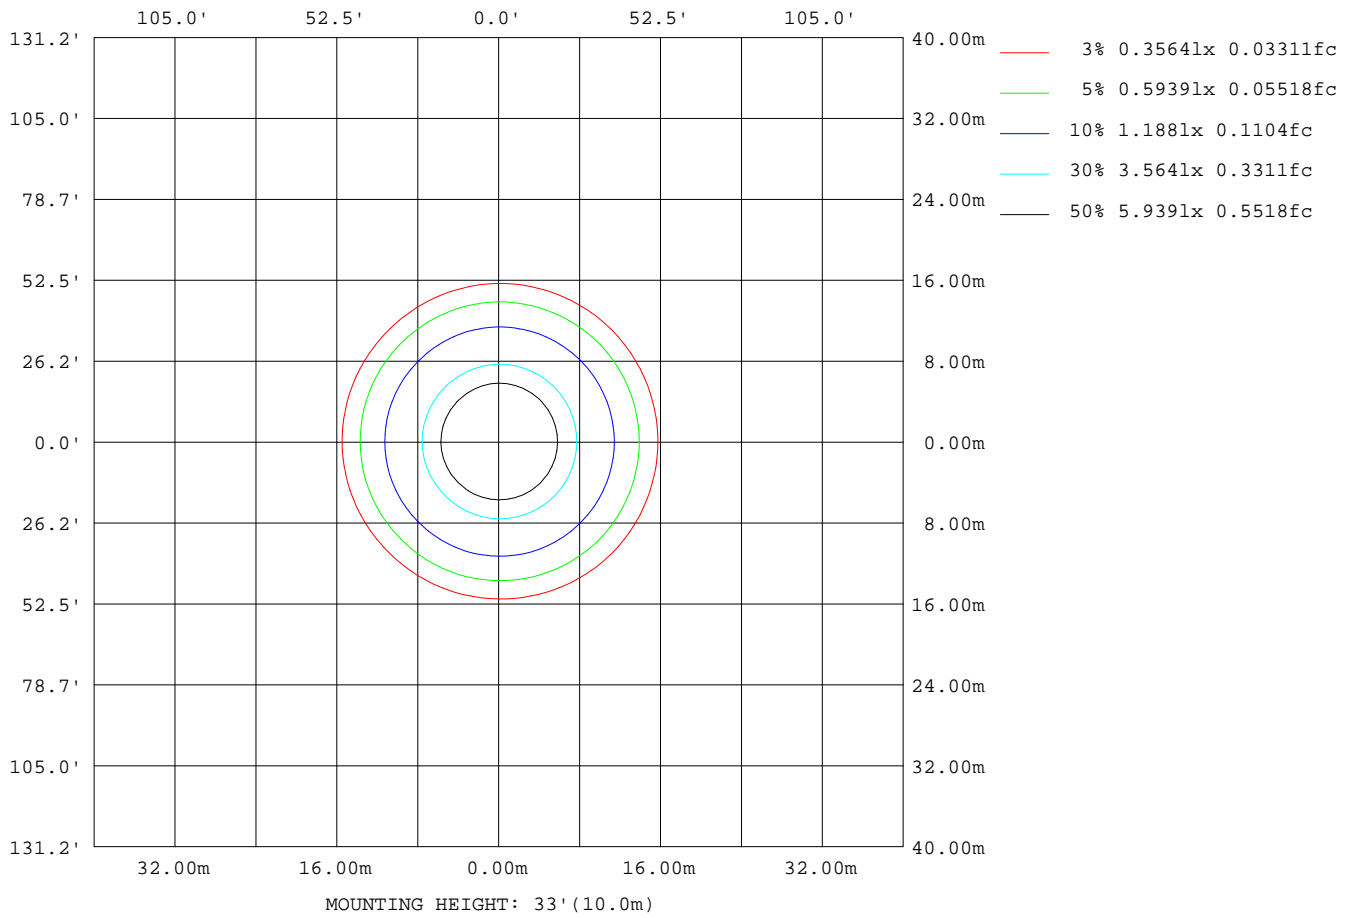

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	45633
L_0~180(75)av	26560
L_0~180(85)av	17901
L_90~270(65)av	44846
L_90~270(75)av	26494
L_90~270(85)av	20784
L_45(65)av	45126
L_45(75)av	26478
L_45(85)av	20650

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

Planar Illuminance Curve

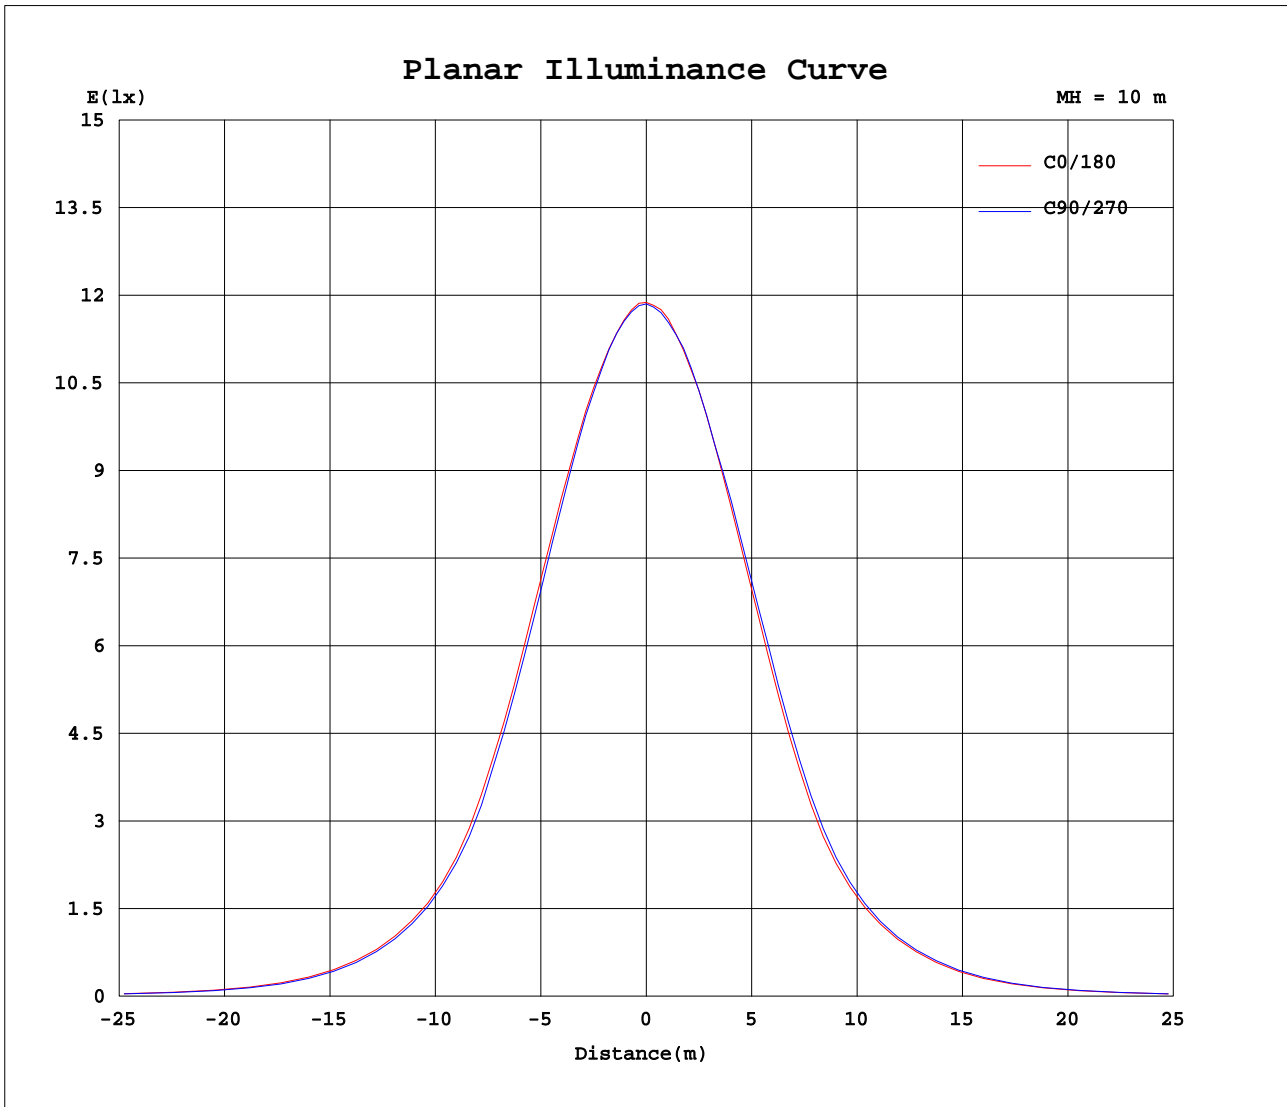

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.38V I:0.1354A P:28.310W PF:0.9488 Freq:50.01Hz Lamp Flux:2182.95x1 lm		
NAME: F9084-28W-5700K	TYPE:	WEIGHT:
SPEC.: 28W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	1188	1187	1185	1184	1188	1187	1185	1184											
5	1184	1184	1180	1175	1184	1179	1179	1181											
10	1161	1165	1159	1157	1158	1158	1162	1165											
15	1140	1140	1132	1133	1136	1133	1136	1137											
20	1089	1085	1076	1063	1074	1081	1082	1094											
25	1038	1033	1019	1012	1018	1022	1034	1041											
30	927	914	899	889	900	905	929	930											
35	824	814	796	782	793	802	824	829											
40	640	633	609	597	609	617	639	649											
45	526	524	507	496	503	513	525	531											
50	389	382	371	362	369	373	384	389											
55	303	298	285	279	286	289	300	304											
60	186	181	170	167	171	173	181	186											
65	125	122	116	112	116	117	121	125											
70	68.4	67.7	65.0	62.9	63.7	63.7	66.4	69.1											
75	44.3	43.7	42.5	41.0	41.4	41.3	42.9	44.4											
80	26.7	26.7	25.5	24.6	24.8	24.8	26.0	26.8											
85	13.1	14.1	13.0	12.0	11.3	12.3	13.6	14.5											
90	0.61	0.62	0.62	0.65	0.36	0.33	0.44	0.32											
95	0.77	0.79	0.80	0.83	0.48	0.45	0.56	0.42											
100	1.10	1.11	1.15	1.16	0.72	0.70	0.81	0.66											
105	1.34	1.35	1.41	1.43	0.93	0.92	1.04	0.88											
110	1.78	1.80	1.85	1.87	1.28	1.29	1.40	1.24											
115	2.09	2.11	2.16	2.18	1.57	1.57	1.70	1.50											
120	2.57	2.59	2.63	2.66	2.04	2.02	2.14	1.95											
125	2.89	2.90	2.94	2.98	2.37	2.34	2.43	2.27											
130	3.36	3.36	3.40	3.44	2.86	2.81	3.00	2.73											
135	3.65	3.65	3.70	3.73	3.18	3.13	3.28	3.06											
140	4.06	4.03	4.12	4.11	3.63	3.57	3.59	3.48											
145	4.29	4.27	4.35	4.34	3.88	3.84	3.87	3.74											
150	4.60	4.59	4.64	4.66	4.23	4.23	4.25	4.13											
155	4.81	4.79	4.85	4.86	4.47	4.47	4.51	4.39											
160	5.11	5.12	5.16	5.18	4.84	4.85	4.88	4.77											
165	5.32	5.33	5.36	5.39	5.02	5.04	5.03	4.97											
170	5.47	5.47	5.50	5.53	5.33	5.38	5.31	5.31											
175	5.61	5.68	5.60	5.69	5.46	5.56	5.45	5.51											
180	5.63	5.71	5.59	5.68	5.62	5.70	5.60	5.68											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks: