
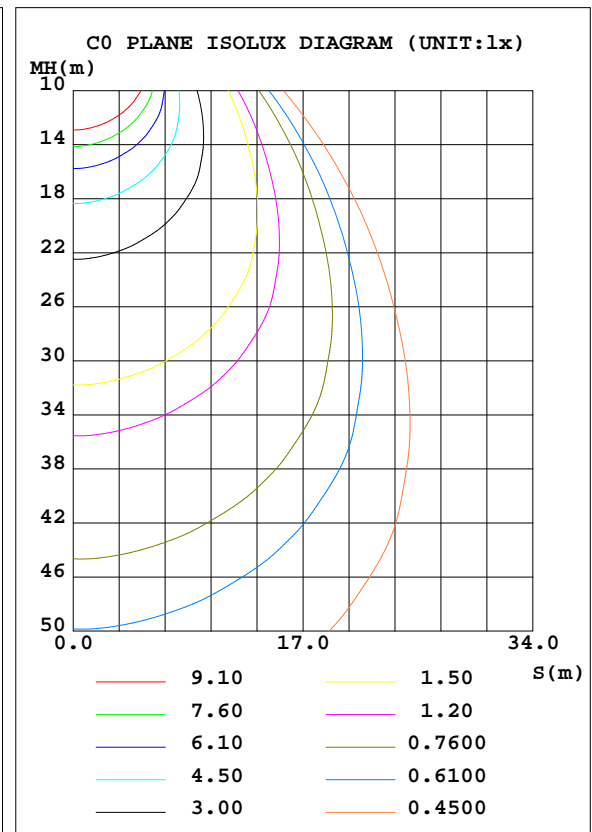


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.21 lm/W			
MODEL	F9084-38W-5700K	I _{max} (cd)	1516	S/MH(C0/180)	1.16
NOMINAL POWER(W)	38	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2839.3	η UP, DN(C0-180)	0.4,50.6
NOMINAL FLUX(lm)	2839.26	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3,48.7
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	99.3	CIBSE SHR MAX	1.25

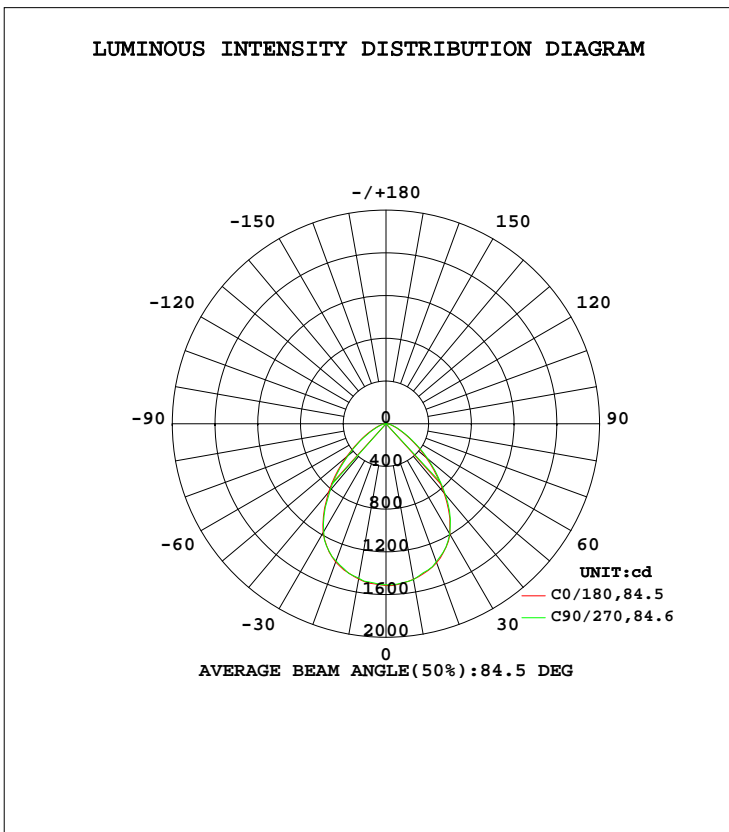

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1480	1478	1482	1478	1477	1476	1468	1468	0- 10	142.4	142.4	5.02,5.02
20	1384	1374	1376	1370	1378	1365	1368	1376	10- 20	404.0	546.4	19.2,19.2
30	1196	1200	1195	1180	1178	1162	1167	1180	20- 30	594.4	1141	40.2,40.2
40	847.3	870.0	864.0	855.1	837.8	817.2	811.6	830.6	30- 40	635.8	1777	62.6,62.6
50	490.8	517.5	511.8	507.7	486.6	470.3	464.8	478.6	40- 50	509.8	2286	80.5,80.5
60	224.2	238.9	241.0	236.8	229.2	209.1	205.5	209.5	50- 60	309.0	2595	91.4,91.4
70	90.05	99.26	103.0	99.67	93.27	84.41	80.43	82.61	60- 70	147.3	2743	96.6,96.6
80	35.23	38.50	38.98	37.78	35.34	31.93	30.78	31.96	70- 80	61.96	2805	98.8,98.8
90	0.8149	0.7901	0.7602	0.7865	0.4574	0.4569	0.7171	0.4388	80- 90	14.28	2819	99.3,99.3
100	1.472	1.412	1.399	1.412	0.9329	0.9464	1.269	0.9171	90-100	1.001	2820	99.3,99.3
110	2.375	2.300	2.306	2.315	1.650	1.707	2.103	1.648	100-110	1.708	2822	99.4,99.4
120	3.380	3.306	3.289	3.313	2.600	2.639	2.903	2.562	110-120	2.498	2824	99.5,99.5
130	4.371	4.315	4.273	4.319	3.635	3.626	4.110	3.534	120-130	3.138	2827	99.6,99.6
140	5.238	5.159	5.176	5.141	4.622	4.576	4.629	4.452	130-140	3.453	2831	99.7,99.7
150	5.937	5.861	5.874	5.821	5.375	5.395	5.419	5.249	140-150	3.292	2834	99.8,99.8
160	6.642	6.607	6.569	6.567	6.168	6.236	6.256	6.065	150-160	2.764	2837	99.9,99.9
170	7.085	7.067	7.026	7.038	6.859	6.938	6.837	6.799	160-170	1.885	2839	100,100
180	7.231	7.363	7.166	7.257	7.239	7.348	7.169	7.261	170-180	0.6802	2839	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

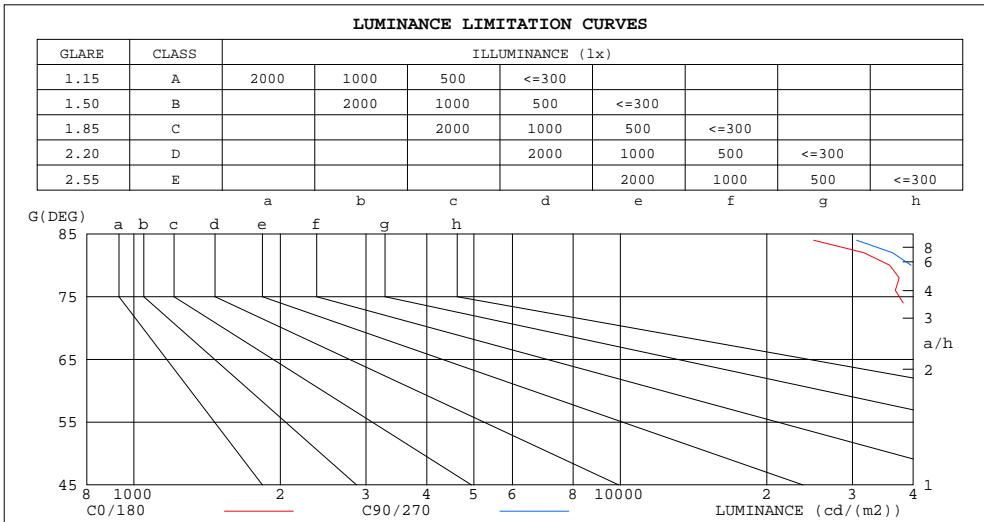

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	29950	36708
80	35784	39590
75	40637	46468
70	46434	53115
65	65311	71334
60	79076	85006
55	113955	119629
50	134674	140435
45	173504	177841


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.91	.86	.94	.89	.85	.91	.87	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.87	.80	.75	.85	.79	.74	.82	.77	.73	.80	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.65	.75	.69	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.64	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.62	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.46	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

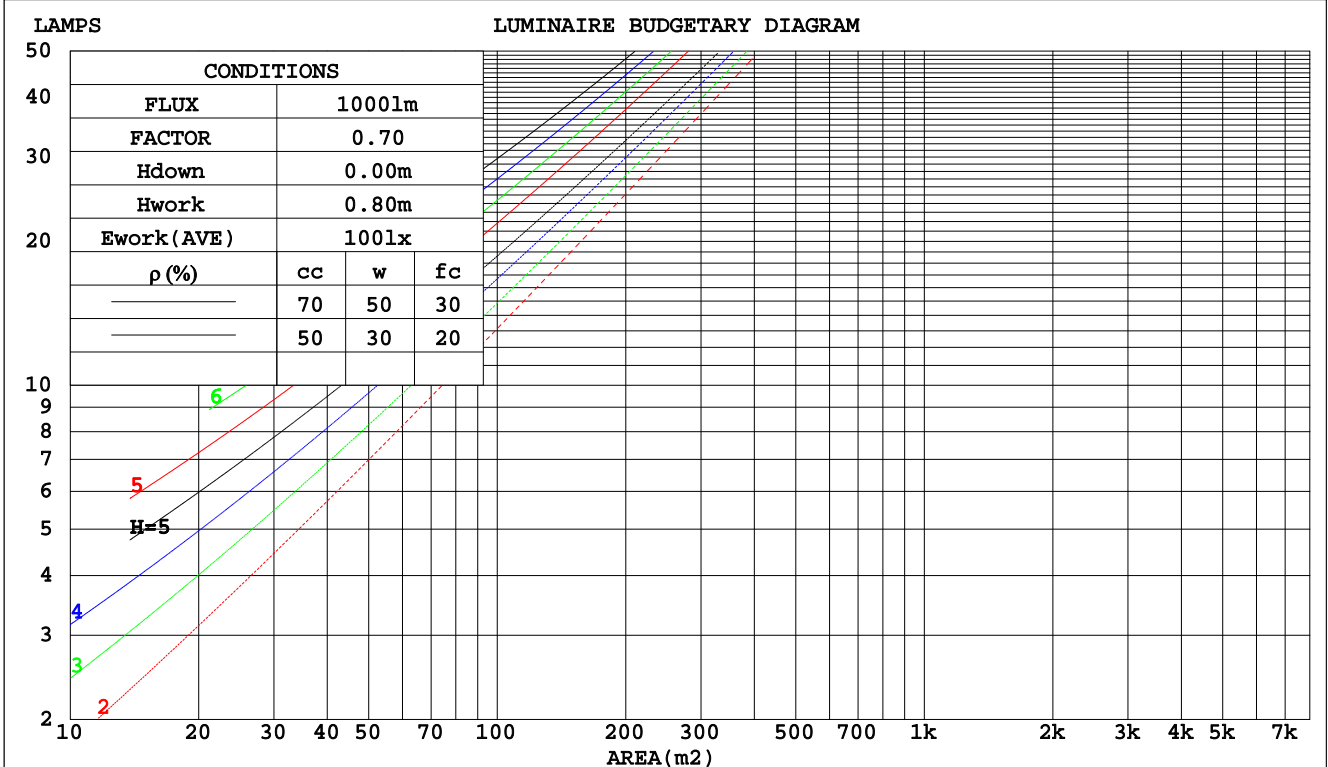

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.241	.137	.043	.234	.134	.042	.221	.127	.040	.209	.120	.039	.197	.114	.037	
2.0	.233	.128	.039	.227	.125	.039	.216	.120	.037	.205	.115	.036	.195	.110	.035	
3.0	.221	.118	.035	.216	.116	.035	.206	.112	.034	.196	.108	.033	.188	.104	.032	
4.0	.209	.108	.032	.204	.107	.032	.195	.103	.031	.187	.100	.030	.179	.097	.030	
5.0	.197	.100	.029	.192	.099	.029	.184	.096	.028	.177	.093	.028	.170	.091	.027	
6.0	.185	.093	.027	.181	.092	.026	.174	.089	.026	.168	.087	.026	.162	.085	.025	
7.0	.175	.086	.024	.171	.085	.024	.165	.083	.024	.159	.082	.024	.154	.080	.023	
8.0	.165	.081	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	.146	.075	.022	
9.0	.156	.076	.021	.154	.075	.021	.149	.073	.021	.144	.072	.021	.139	.071	.020	
10.0	.148	.071	.020	.146	.070	.020	.141	.069	.019	.137	.068	.019	.133	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.167	.167	.167	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.181	.162	.145	.155	.139	.125	.106	.096	.086	.061	.055	.050	.020	.018	.016	
2.0	.170	.138	.111	.146	.119	.096	.100	.082	.067	.058	.048	.039	.018	.015	.013	
3.0	.161	.120	.087	.138	.103	.075	.095	.072	.053	.055	.042	.031	.018	.014	.010	
4.0	.152	.106	.070	.131	.091	.061	.090	.064	.043	.052	.037	.025	.017	.012	.008	
5.0	.145	.095	.058	.125	.082	.050	.086	.057	.036	.050	.034	.021	.016	.011	.007	
6.0	.138	.086	.049	.119	.075	.043	.082	.052	.030	.048	.031	.018	.015	.010	.006	
7.0	.132	.079	.042	.114	.069	.037	.078	.048	.026	.046	.028	.015	.015	.009	.005	
8.0	.126	.073	.037	.109	.064	.032	.075	.045	.023	.044	.026	.014	.014	.009	.005	
9.0	.121	.068	.033	.104	.059	.029	.072	.042	.020	.042	.025	.012	.014	.008	.004	
10.0	.116	.064	.030	.100	.056	.026	.069	.039	.018	.040	.023	.011	.013	.008	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.0	25.0	26.2	26.4	24.9	26.2	25.1	26.4	26.6
3H	25.0	26.2	25.3	26.4	26.7	25.3	26.4	25.5	26.7	26.9
4H	25.1	26.2	25.4	26.5	26.7	25.4	26.5	25.7	26.7	27.0
6H	25.2	26.2	25.5	26.5	26.8	25.4	26.5	25.8	26.8	27.0
8H	25.2	26.2	25.5	26.5	26.8	25.5	26.5	25.8	26.7	27.0
12H	25.1	26.1	25.5	26.4	26.7	25.4	26.4	25.8	26.7	27.0
4H 2H	24.9	26.0	25.2	26.2	26.5	25.0	26.1	25.3	26.4	26.6
3H	25.3	26.3	25.6	26.6	26.9	25.5	26.5	25.9	26.8	27.1
4H	25.4	26.3	25.8	26.6	27.0	25.7	26.5	26.1	26.9	27.2
6H	25.6	26.4	26.0	26.7	27.1	25.8	26.6	26.2	27.0	27.3
8H	25.6	26.3	26.0	26.7	27.1	25.9	26.6	26.3	27.0	27.4
12H	25.6	26.3	26.1	26.7	27.1	25.9	26.6	26.3	26.9	27.4
8H 4H	25.5	26.2	25.9	26.5	26.9	25.7	26.4	26.1	26.8	27.2
6H	25.7	26.3	26.2	26.7	27.1	25.9	26.5	26.4	26.9	27.4
8H	25.8	26.3	26.3	26.7	27.2	26.0	26.6	26.5	27.0	27.5
12H	25.8	26.2	26.3	26.7	27.2	26.1	26.5	26.6	27.0	27.5
12H 4H	25.4	26.1	25.9	26.5	26.9	25.7	26.3	26.1	26.7	27.1
6H	25.7	26.2	26.2	26.7	27.1	25.9	26.5	26.4	26.9	27.4
8H	25.8	26.2	26.3	26.7	27.2	26.1	26.5	26.5	27.0	27.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.8 / - 1.0					+ 0.7 / - 0.9				
1.5H	+ 0.4 / - 0.5					+ 0.4 / - 0.5				
2.0H	+ 1.7 / - 1.5					+ 1.6 / - 1.5				

CIE Pub.117, 2839 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.6)
 Area: 0.00567 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	90	83	78	88	81	77	71
1.50	96	88	83	94	87	82	92	86	81	75
2.00	101	95	90	100	94	89	96	91	87	81
2.50	104	98	94	102	97	93	99	94	91	83
3.00	107	101	97	105	100	96	101	97	94	86
4.00	110	105	102	107	103	100	103	100	98	89
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

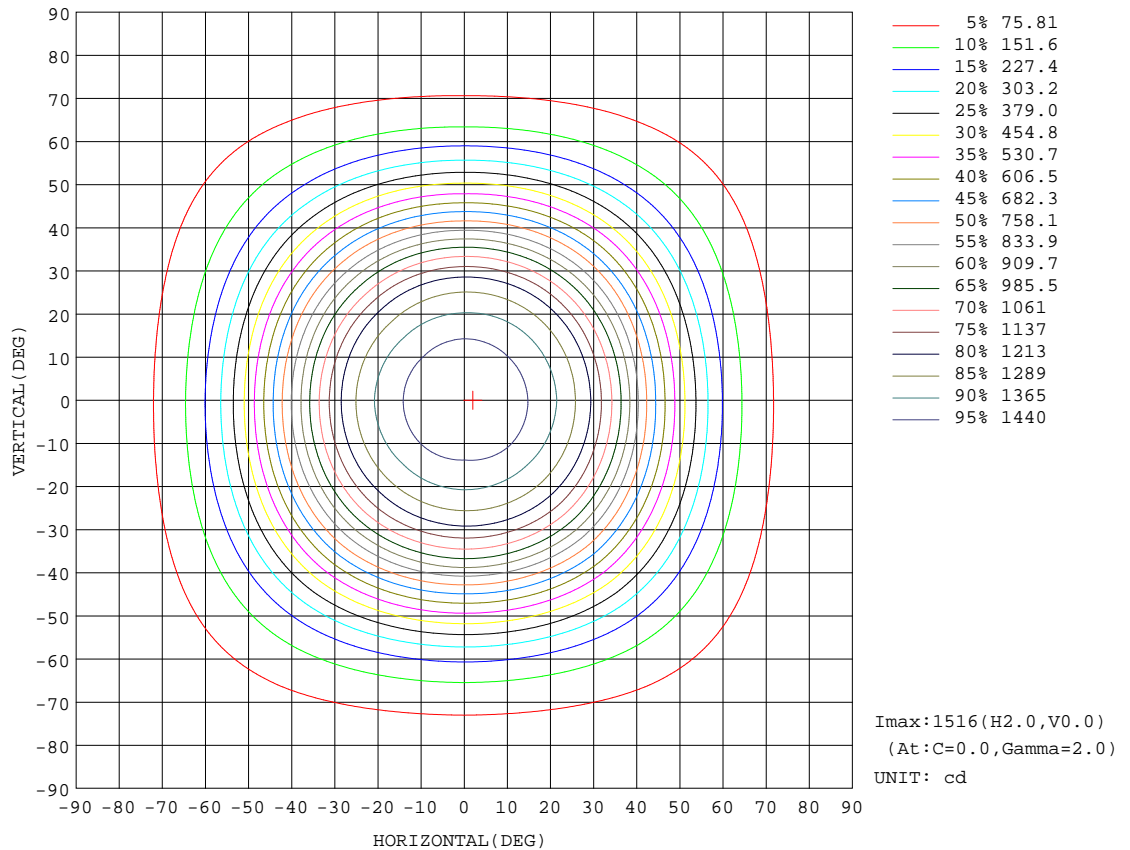


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

Flux out:2002 lm

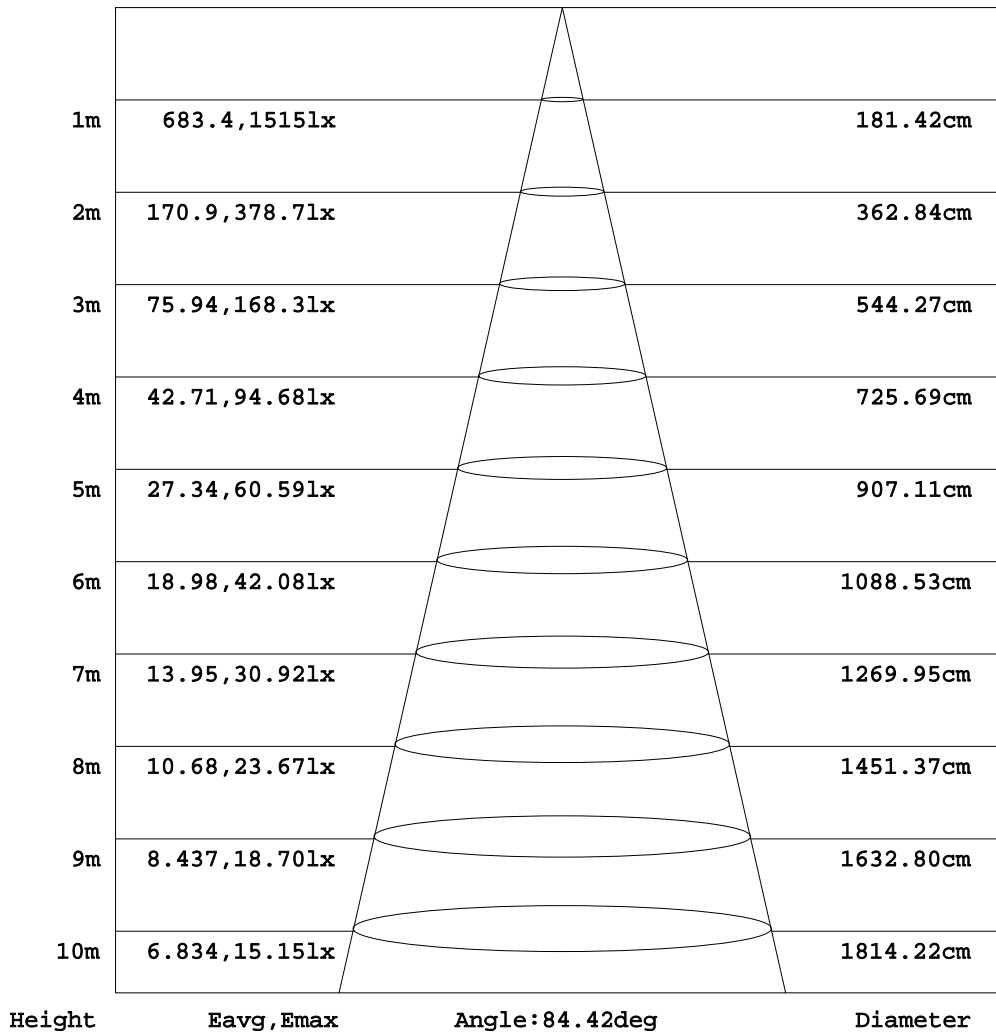


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

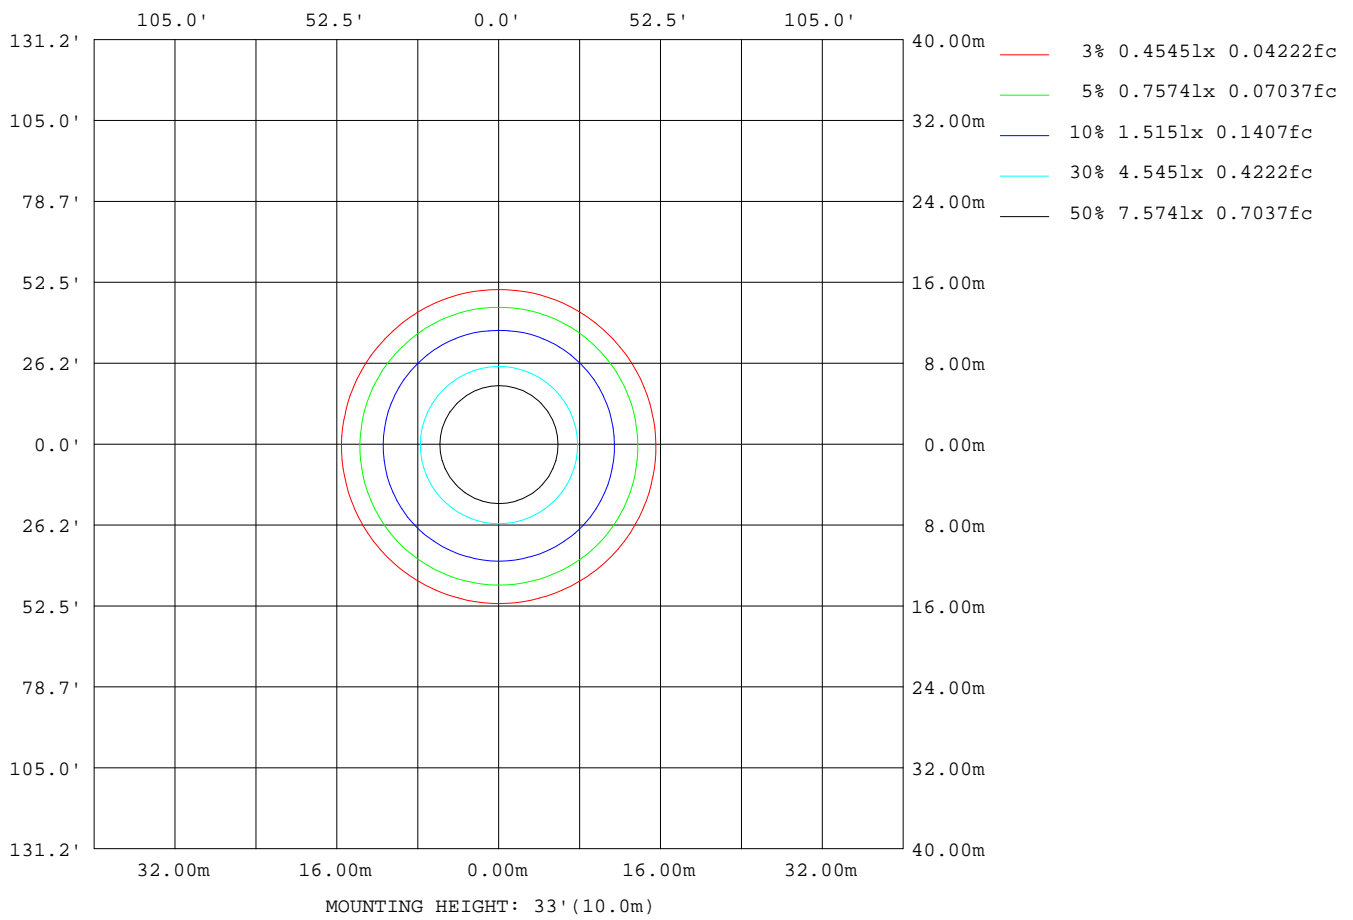

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	60328
L_0~180(75)av	37523
L_0~180(85)av	19172
L_90~270(65)av	59914
L_90~270(75)av	37958
L_90~270(85)av	22476
L_45(65)av	60259
L_45(75)av	37866
L_45(85)av	22268

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks:

Planar Illuminance Curve

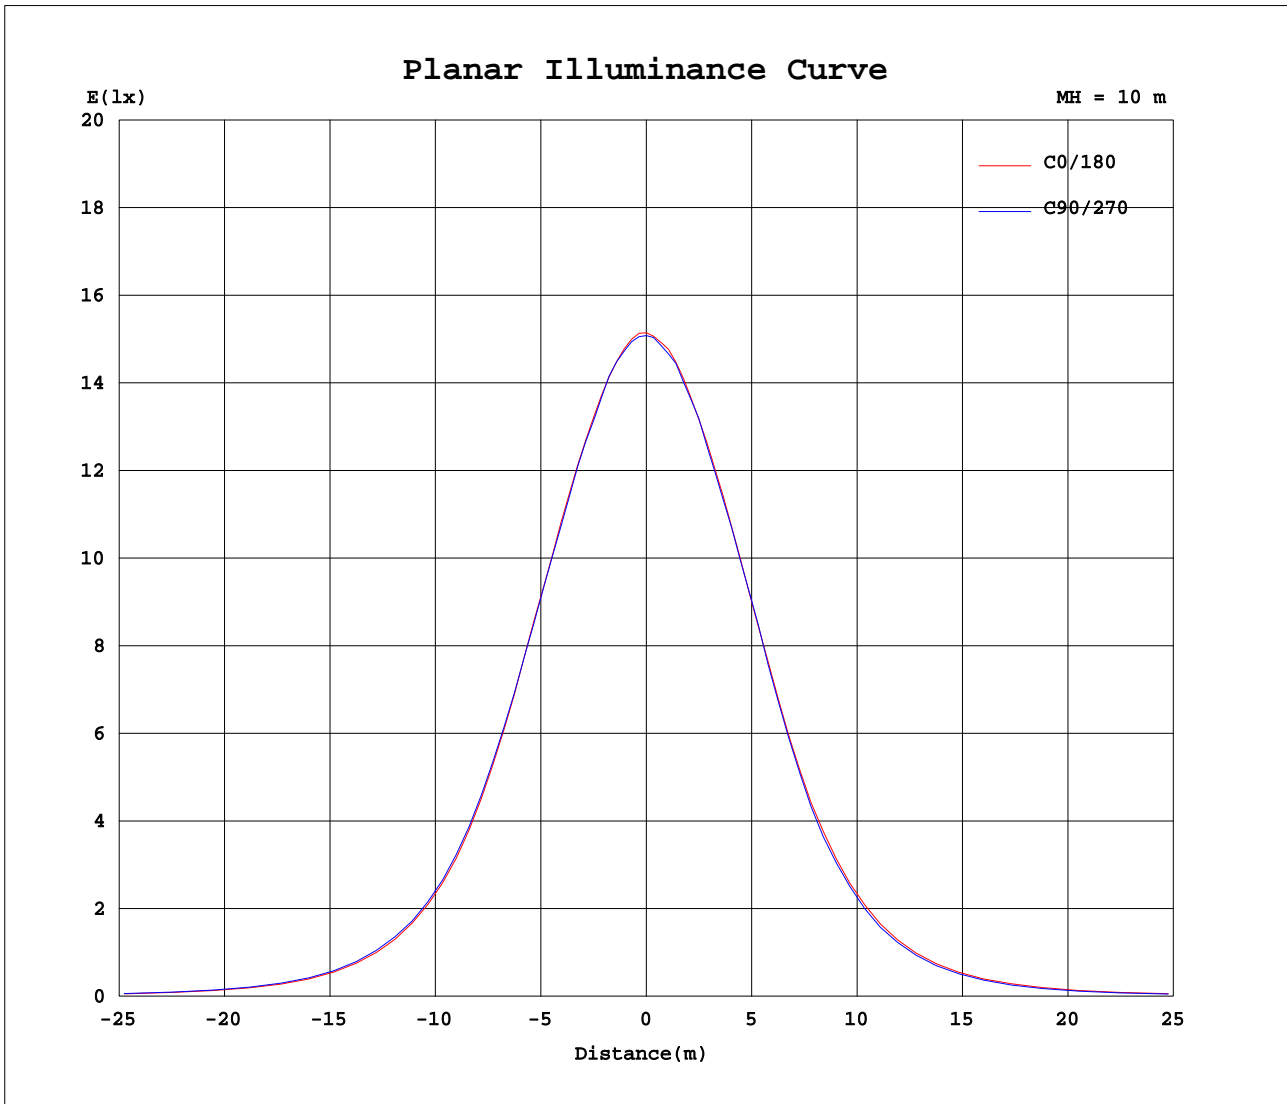

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators:
 Test Date: 2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 7.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.45V I:0.1744A P:37.258W PF:0.9693 Freq:50.01Hz Lamp Flux:2839.26x1 lm		
NAME: F9084-38W-5700K	TYPE:	WEIGHT:
SPEC.: 38W	DIM.:	SERIAL No.:
MFR.: FILUX	SUR.: 85mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1515	1511	1508	1506	1515	1511	1508	1506										
5	1510	1504	1505	1497	1503	1501	1496	1499										
10	1480	1478	1482	1478	1477	1476	1468	1468										
15	1447	1448	1439	1443	1442	1438	1444	1443										
20	1384	1374	1376	1370	1378	1365	1368	1376										
25	1320	1325	1317	1311	1313	1301	1308	1315										
30	1196	1200	1195	1180	1178	1162	1167	1180										
35	1069	1082	1079	1067	1049	1030	1039	1050										
40	847	870	864	855	838	817	812	831										
45	696	727	713	716	692	674	673	685										
50	491	517	512	508	487	470	465	479										
55	371	393	389	384	366	348	345	353										
60	224	239	241	237	229	209	206	209										
65	157	169	171	168	159	148	143	146										
70	90.0	99.3	103	99.7	93.3	84.4	80.4	82.6										
75	59.6	66.2	68.2	66.2	61.5	55.9	53.9	55.1										
80	35.2	38.5	39.0	37.8	35.3	31.9	30.8	32.0										
85	14.8	18.2	18.1	17.2	14.3	13.8	13.6	14.5										
90	0.81	0.79	0.76	0.79	0.46	0.46	0.72	0.44										
95	1.04	1.02	0.99	1.01	0.62	0.62	0.92	0.60										
100	1.47	1.41	1.40	1.41	0.93	0.95	1.27	0.92										
105	1.82	1.74	1.74	1.75	1.19	1.21	1.57	1.17										
110	2.38	2.30	2.31	2.31	1.65	1.71	2.10	1.65										
115	2.78	2.71	2.70	2.71	2.01	2.07	2.41	2.00										
120	3.38	3.31	3.29	3.31	2.60	2.64	2.90	2.56										
125	3.78	3.70	3.69	3.72	3.01	3.04	3.33	2.96										
130	4.37	4.31	4.27	4.32	3.64	3.63	4.11	3.53										
135	4.74	4.69	4.65	4.69	4.05	4.03	4.41	3.92										
140	5.24	5.16	5.18	5.14	4.62	4.58	4.63	4.45										
145	5.55	5.46	5.48	5.44	4.95	4.91	4.96	4.78										
150	5.94	5.86	5.87	5.82	5.38	5.40	5.42	5.25										
155	6.19	6.13	6.14	6.08	5.68	5.72	5.75	5.56										
160	6.64	6.61	6.57	6.57	6.17	6.24	6.26	6.06										
165	6.88	6.84	6.81	6.82	6.41	6.48	6.48	6.33										
170	7.08	7.07	7.03	7.04	6.86	6.94	6.84	6.80										
175	7.25	7.34	7.20	7.28	7.08	7.21	7.01	7.07										
180	7.23	7.36	7.17	7.26	7.24	7.35	7.17	7.26										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:
 Test Date:2020-08-17

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:7.250m [K=1.0000]
 Remarks: