



Outdoor 	IP66	100-277V AC	50/60 Hz	1.5m		Max 60°C Min -40°C	
-------------	------	----------------	-------------	------	--	-----------------------------	--

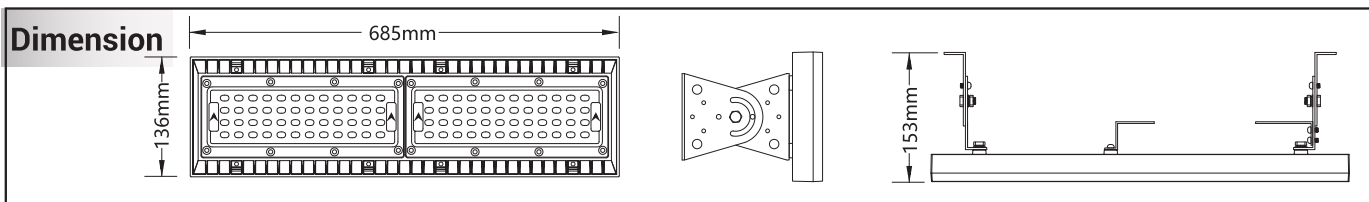


Installation


Step 1: Drill mounting holes.

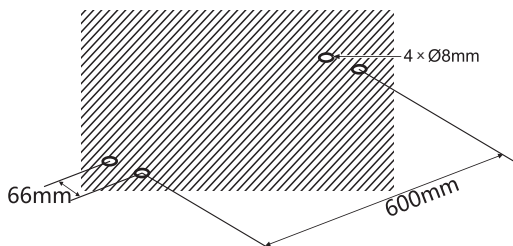


Step 2: Install 4pcs M8 expansion bolts in the holes.

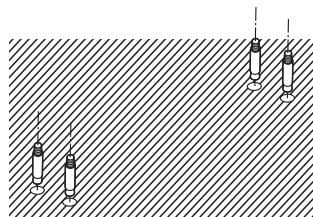


Step 3: Fix the base of bracket. (M8 nuts must be tightened with a torque greater than 4N.M.)

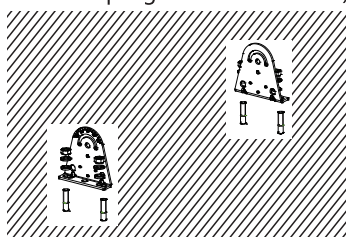


Step 4: Fix the lamp body in the bracket base.

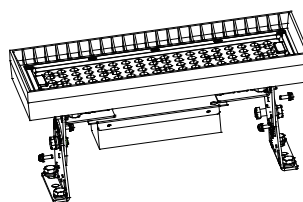


Note: Adjust angle of the bracket to meet the specified requirement. The maximum adjustment rotation angle is 180°.

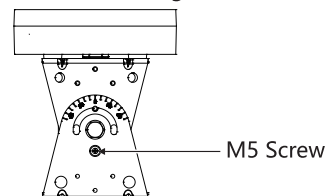

Step 5: there is arrow mark in both side of lens, When installation, ensure the arrow toward play area of stadium.

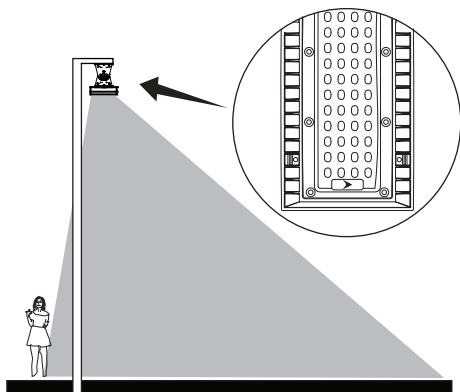

Step 6: Connect the AC cable, take care of the waterproof processing. The cable should comply with voltage $\geq 300/500V$ and national standard with min. $3 \times 1.0mm^2$.

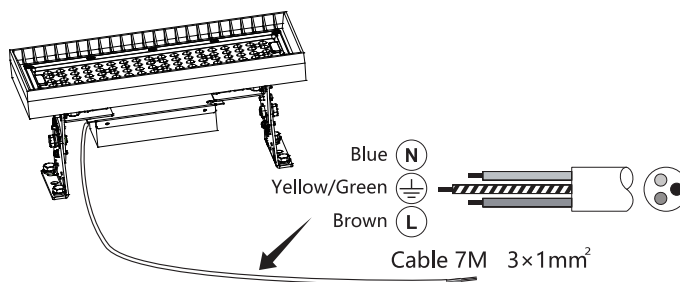

PRECAUCIONES DE SEGURIDAD/SAFETY PRECAUTIONS

- Este producto debe ser instalado solamente por profesionales./This product must only be installed by professionals.
- Producto de alto voltaje. Si hay algún daño en la línea eléctrica o en la carcasa del producto el personal no profesional no están autorizados a mantener o instalar lo defectuosos y no debe utilizarse el producto. / High voltage product. If there is any damage on the power line or the shell of the product. Non-professional are not allowed to maintain or install taken as defective must not be used the product.